



BEAMLINE SLIM

742167.0025.1 | Surface mounted projector

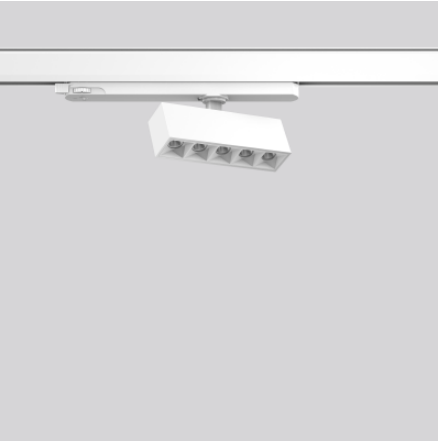

Surface mounted projectors
4051859743880
L 145, B 35, H 80

Track on ceiling, Wall track
traffic white, matt (RAL 9016)

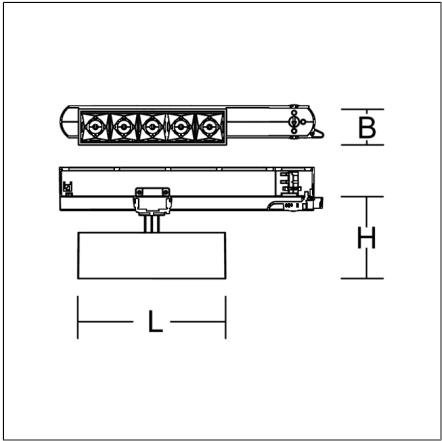

Linear surface mounted projector for aesthetically sophisticated lighting. Housing: metal, powder-coated. Perfect heat management with an aluminium heat sink. Rotation range: 356°. Swivel range: 90°. LED light unit with MRS technology: Mini-Reflector-System made of metallised thermoplastic with prismatic white glare-suppressing frame for pleasant glare-free light (UGR < 10). Narrow beam light distribution. With multi adaptor for 3-circuit tracks 230 V. Suitable for Track on ceiling, Wall track. Converter integrated in the adaptor.

Product specifications

Length L	145 mm
Width B	35 mm
Height H	80 mm
Weight	0.4 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	980 lm
System power	14 W
System efficiency	70 lm/W
Glare evaluation UGR (4H 8H)	3,5
Beam angle	12°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	90
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	33
Luminaires on B16A fuse	53
Luminaires on C10A fuse	53
Luminaires on C16A fuse	84
Inrush current / Inrush current duration	9.5 A / 16 µs
CIE Flux Code / CEN Flux Code	100 100 100 100 100
Type of protection	IP 20
Protection class	II
Impact resistance	IK06
Ambient temperature	-20 °C ... + 30 °C
Conformity mark	CE, EAC