

Omega Pro 2

92913441 OP2 4400-840 MPT HFIX Q600

THORN




Omega Pro 2

A recessed/surface/suspended, edge-lit LED luminaire. LED driver, DALI-2 dimmable. Class II electrical, IP40_IP20, Impact strength: IK03. Body: sheet steel, finished white (close to RAL9016). Diffuser: UV-stabilised polycarbonate microprismatic optic for maximised spacing. Electrical connection via piano key terminals, loop-in/loop-out possible. Complete with 4000K LED, Colour Rendering Index min.: 80


Dimensions: 597 x 597 x 55 mm
Luminaire input power: 35 W
Luminaire luminous flux: 4450 lm
Luminaire efficacy: 127 lm/W
Weight: 5.05 kg



TLG_OMP2_F_QMPT_PDB.jpg

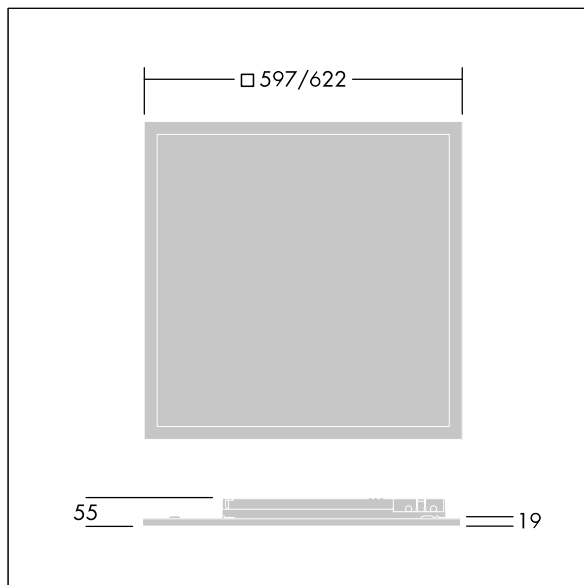

TLG_OMP2_M_Q.wmf

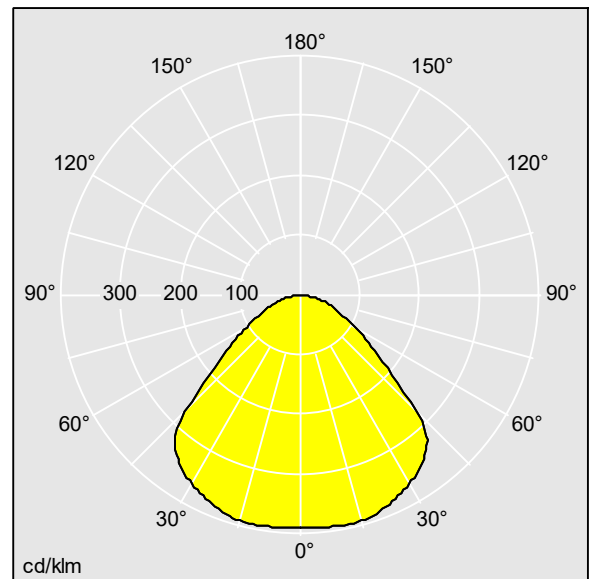

TLG_SP_0043959.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 4450 lm
Luminaire efficacy*: 127 lm/W
Colour Rendering Index min.: 80
Ballast: 1 x 28000672 LCA 45W 500-1400mA one4all SR PRE
Correlated colour temperature*: 4000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated median useful life*:
L90 50000 h at 25 °C
Luminaire input power*: 35 W Power factor = 0.98
Standby Power*: 0.15 W
Dimming: Dali2Dim dimmable to 10%
Maintenance category CIE 97: D - Enclosed IP2X
LOR: 1,00 ULOR: 0,00 DLOR: 1,00

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting