




Recessed projectors
4051859935698
L 622, B 190, H 39

Lay-in luminaires
silver, matt (approx. RAL 9006)

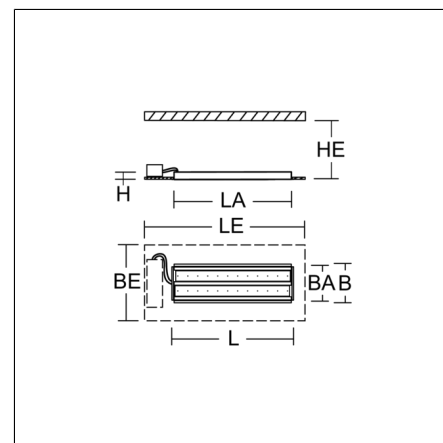

Einlege/Einbau-Flächenstrahler. Housing: sheet steel, powder-coated. 2xSwivel range: 90°. High-efficiency LED units with flush-mounted opal diffuser made of non-yellowing PMMA. Symmetrical wide beam light emission. Suitable for laying in grid ceiling module 625. Connected converter included in separate gearbox. Suitable for through-wiring. MultiLumen: Luminous flux adjustable in 3 steps. Accessories: Mounting frame for installation in suspended ceilings. Environmentally friendly and resource-saving due to replaceable and recyclable components.

Product specifications

Length L	622 mm
Width B	190 mm
Height H	39 mm
Cut-out length LA	602 mm
Cut-out width BA	174 mm
Installation space length LE	700 mm
Installation space width BE	390 mm
Installation space height HE	100 mm
Weight	3.55 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	4900 lm 6450 lm 8750lm
System power	35 W 47 W 68W
System efficiency	129 lm/W 137 lm/W 140lm/W
Glare evaluation UGR (4H 8H)	28 29 30
Beam angle	112°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Electronic ballast, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	15
Luminaires on B16A fuse	25
Luminaires on C10A fuse	26
Luminaires on C16A fuse	42
Inrush current / Inrush current duration	10 A / 50 µs
CIE Flux Code / CEN Flux Code	47 79 96 100 100
Type of protection	IP 20 on room side IP 20
Protection class	I
Filament test	650 °C
Impact resistance	IK03
Ambient temperature	5 °C ... + 25 °C
Conformity mark	CE

TX-MOVE

901739.004.1.76 | Recessed projectors



Accessories



982869.004

Mounting frame for installation in suspended ceilings.