


ANDHO midi

931197.004.1.76 | Surface mounted downlights



Surface mounted downlights
4051859492641
D 154, H 157

Ceiling mounting
silver, matt (approx. RAL 9006)

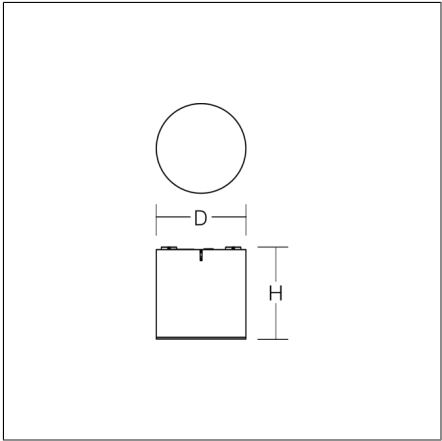

High-quality surface-mounted downlight for indoor and outdoor use. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. With membrane valve as a standard to avoid condensed water. Cover clear single-pane toughened glass. Rotation-symmetric reflector made of reflex-boosted MIRO-SILVER®. Easy installation with a separate ceiling frame and plug connection.. 5 pole double terminal for through-wiring.

Product specifications

| | |
|--|----------------------------|
| Diameter D | 154 mm |
| Height H | 157 mm |
| Weight | 2.6 kg |
| Light source | LED |
| Colour temperature | 4000 K |
| Rated luminous flux | 4150 lm |
| System power | 31 W |
| System efficiency | 134 lm/W |
| Glare evaluation UGR (4H 8H) | 21,2 |
| Beam angle | 63° |
| Rated life | 50000 h (L80/B10) |
| Colour rendering index (CRI) | 80 |
| Colour tolerance | 2 |
| Photobiological safety according to EN 62471 | Risk group 1 |
| Driver | Converter, dimmable |
| Control | DALI |
| Voltage | 220 - 240 V / 50 Hz, 60 Hz |
| Luminaires on B10A fuse | 21 |
| Luminaires on B16A fuse | 34 |
| Luminaires on C10A fuse | 35 |
| Luminaires on C16A fuse | 57 |
| Inrush current / Inrush current duration | 18 A / 250 µs |
| CIE Flux Code / CEN Flux Code | 94 98 99 100 100 |
| Type of protection | IP 65 |
| Protection class | I |
| Filament test | 960 °C |
| Impact resistance | IK08 |
| Ambient temperature | -20 °C ... + 30 °C |
| Conformity mark | CE, EAC |

Accessories




982716.004
Pendant set, 3 m with 5-pin power cable (IP 68)



982720.004
Pendant set, 5 m with 5-pin power cable (IP 68)

ANDHO midi

931197.004.1.76 | Surface mounted downlights



982160.000
Reeded glass