


Wall luminaires  
4051859985853  
L 250, B 90, H 140

Wall (surface)  
traffic white, matt (RAL 9016)

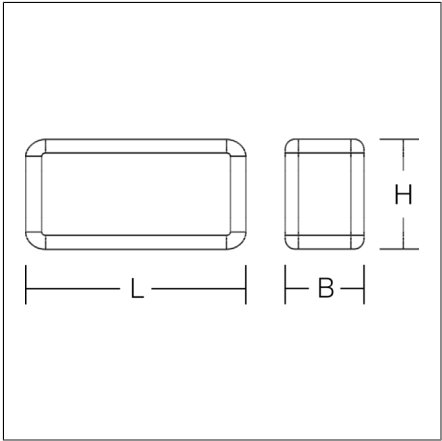

Luminaire for escape route identification. Housing: aluminium, with plastic corner connectors. Display panel: plastic, opal, with legend on one side. Electronic ballast included. Self-contained system with automatic self-test. Please indicate legend number when placing your order!

Product specifications

Type of emergency lighting	Self-contained system
Monitoring	Autotest
Battery	LiFePO4
Duration	3 h
Operating mode	maintained power mode
Viewing Distance	21 m
Length L	250 mm
Width B	90 mm
Height H	140 mm
Weight	1.21 kg
Light source	LED
Colour temperature	4000 K
System power, mains operation	3 W   undefined W
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
CIE Flux Code / CEN Flux Code	34 63 85 72 100
Type of protection	IP 44
Protection class	I
Filament test	650 °C
Impact resistance	IK03
Ambient temperature for maintained power	0 °C ... + 25 °C
Ambient temperature for non-maintained power mode	5 °C ... + 40 °C
Conformity mark	CE, EAC