

# INDO LED 30W 4000K

DETAILED CARD



## TECHNICAL PARAMETERS

Index:	380099
Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	30
Luminous flux [lm]*:	2600
Colour temperature [K]:	4000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	F
Material of the body:	powder coated steel

## CHARACTERISTICS

Recessed mounted square luminaire with an integrated energy-saving LED GO! light source. Powder-coated steel body. The lens diffuser is made of perforated metal sheet. It provides comfortable and soft light. UGR < 19.

## APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. Suitable as a general light source for all sorts of work that require optical focus. Dedicated for new applications and as a replacement of traditional T8 and T5 tube luminaires with energy-saving LED lamps.


# INDO LED 30W 4000K

## DETAILED CARD

### TECHNICAL PARAMETERS TABLE

Nominal power [W]:	30	Diffuser type:	perforated
Index:	380099	Material of the body:	powder coated steel
Colour temperature [K]:	4000	Colour of the body:	white
Light source:	LED module	Impact resistance:	IK07
Luminous flux [lm]:	2600	Ingress protection:	IP20
Supply voltage [V]:	220-240	Mounting version:	recessed
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -20 to +35
Dimensions (H/W/T/S) [mm]:	595/595/105	Net weight [kg]:	3.800
Energy efficiency class:	F	CE certificate:	<a href="#">29/2015</a>
Luminous efficacy [lm/W]:	86	EAN:	5905963380099
Electrical protection class:	I	Category type:	louvres
Colour rendering index:	>80	Warranty [years]:	5
SDCM:	≤ 3	ETIM class:	EC002892
Power factor:	0.95	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
LED lifespan L70B50 [h]:	50000	Rated power of the luminaire [W]:	30
Diffuser material:	powder coated steel	Manual:	<a href="#">Download PDF</a>
		Plik LDT:	<a href="#">Download</a>

### LIGHT CURVES

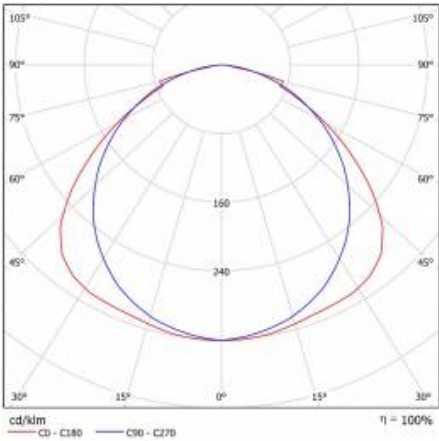

# INDO LED 30W 4000K

DETAILED CARD

## ACCESSORIES AVAILABLE


index	Name
999543	Plasterboard recessing kit 630x630 white (steel version)



Plasterboard recessing kit 630x630  
white (steel version) (999543)

Card creation date: 08 January 2025  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 29/2015