


Wall luminaires  
4051859960003  
L 303, B 130, H 79

Wall (surface)  
traffic white, matt (RAL 9016)

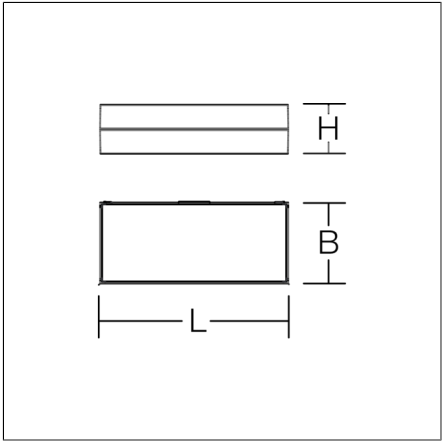

Architectural wall luminaire for the illumination of areas close to buildings. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. With membrane valve as a standard to avoid condensed water. Cover clear single-pane toughened glass, edge printed. Replaceable LED spot modules according to ZHAGA standards. Asymmetrical single-sided narrow light distribution for area lighting (e.g. squares, parking lots) Very easy installation thanks to plug & play connection. Base fixing slots outside of gasketed area, drill hole deviations can be compensated. Luminaire can be mounted in any focal position. Driver integrated. Suitable for through-wiring.

Product specifications

Length L	303 mm
Width B	130 mm
Height H	79 mm
Weight	4.25 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	4650 lm
System power	32 W
System efficiency	145 lm/W
Glare evaluation UGR (4H 8H)	40,3
Beam angle	71°/68°/0°/68°
Rated life	100000 h (L90/B50)
Colour rendering index (CRI)	70
Colour tolerance	5
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	21
Luminaires on B16A fuse	34
Luminaires on C10A fuse	35
Luminaires on C16A fuse	57
Inrush current / Inrush current duration	18 A / 250 µs
CIE Flux Code / CEN Flux Code	30 67 96 100 100
Type of protection	IP 65
Protection class	I
Filament test	650 °C
Impact resistance	IK04
Ambient temperature	-20 °C ... + 45 °C
Conformity mark	CE, EAC