


FLAT POLYMERO IP44

221154.002.2 | Ceiling and wall luminaires



Ceiling and wall luminaires
4051859075660
D 420, H 150

Ceiling mounting, Wall (surface)
white

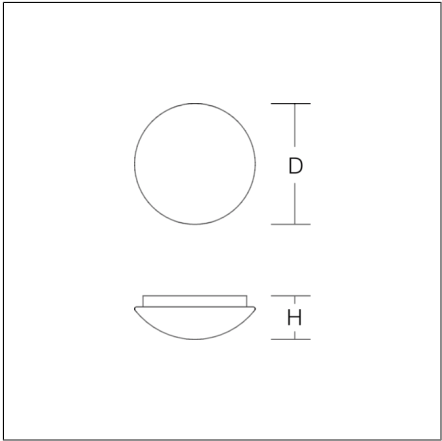

Decorative round surface-mounted luminaire for indoor and outdoor use. Base: plastic. Diffuser made of plastic (polycarbonate), opal, shock-proof. Diffuser fastening: spring system. Suitable for Ceiling mounting, Wall (surface). IP 43 ceiling mounting, IP 44 wall mounting.

Product specifications

Diameter D	420 mm
Height H	150 mm
Weight	1.76 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	2200 lm
System power	19 W
System efficiency	116 lm/W
Glare evaluation UGR (4H 8H)	20,2
Beam angle	down 117° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	Phase cut-off/cut-on
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	84
Luminaires on B16A fuse	135
Luminaires on C10A fuse	84
Luminaires on C16A fuse	135
Inrush current / Inrush current duration	0.22 A / 200 µs
CIE Flux Code / CEN Flux Code	42 71 89 91 100
Type of protection	IP 43 ceiling mounting IP 44 wall mounting
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK10
Ambient temperature	25 °C
Conformity mark	CE, EAC

Spareparts



08-5146.022
Replacement diffuser