

# Cesar Amp

96701245 CESAR AMP M U/D 2L930MB RD ANT

THORN

LED 37W CESA_AMP_M_930_UD	IP65	IK08			
---------------------------	------	------	---	---	--


## Cesar Amp

Cesar Amp a wall mounted, architectural LED luminaire for decorative facade lighting, medium beam distribution. Fixed output Remote LED driver. Class III electrical, IP65, Impact strength: IK08. Housing: die-cast aluminium, powder coated anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED.


Dimensions: Ø140 x 350 mm  
Luminaire input power: 37 W  
Luminaire luminous flux: 2404 lm  
Luminaire efficacy: 65 lm/W  
Weight: 5.08 kg



TLG\_CESA\_F\_AMP\_UD\_WB\_ANT.jpg

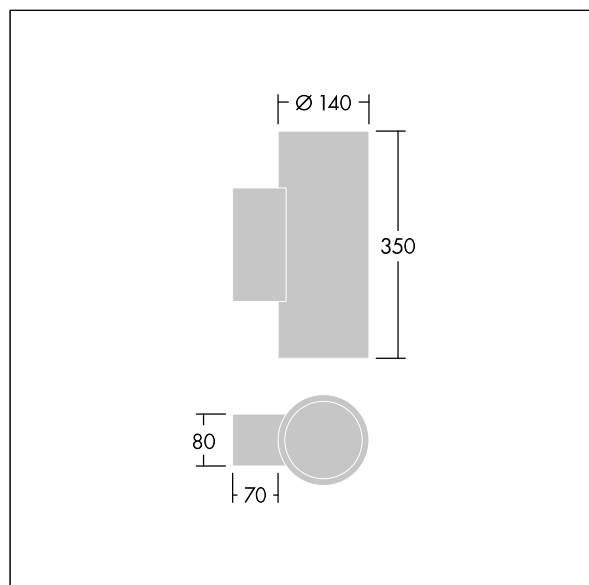

TLG\_CESA\_M\_AMP\_M\_DWN.wmf

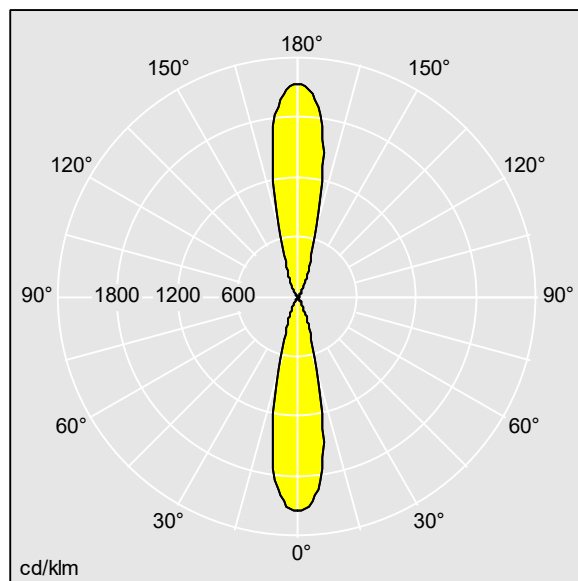

96701245.ltd

Lamp position: STD - standard  
Light Source: LED  
Luminaire luminous flux\*: 2404 lm  
Luminaire efficacy\*: 65 lm/W  
Colour Rendering Index min.: 90  
Correlated colour temperature\*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3  
Rated useful life (B10)\*:  
L80 70000 h at 25 °C  
Ballast: 1x LED\_DRV  
Luminaire input power\*: 37 W  
Dimming: FIX  
LOR: 1,00 ULOR: 0,50 DLOR: 0,50

This product contains a light source of energy efficiency class E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting