


FLAT SLIM disc

312652.0031.730 | Pendant luminaires



Pendant luminaires
4051859803256
D 560, H 75

pendant
anthracite metallic (DB703)

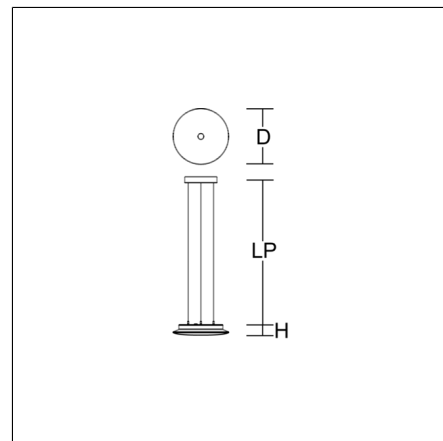

Decorative round LED pendant luminaire. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Canopy made of aluminium, powder-coated. Mouth blown 3-layer opal glass (Triplex glass) with satin finish. Glass fastening: bayonet fixing. Uniform lighting achieved by the use of LED panel boards. Suitable for pendant. 3-point steel cable suspension, steplessly adjustable. Special lengths available on request. MultiLumen: 2 steps adjustable luminous flux. Factory setting is the highest luminous flux. MultiColour: Colour temperature individually adjustable either 3000 K or 4000 K via switching element. Factory setting is 3000 K. With Casambi smart+free Bluetooth® control for wireless network and operation using Android / iOS devices, free app available for download.

Product specifications


Diameter D	560 mm
Height H	75 mm
Suspension length LP	500-1500 mm
Weight	8.4 kg
Light source	LED
Colour temperature	3000 K 4000 K
Rated luminous flux	3000 K: 3500 lm 5050 lm
	4000 K: 3600 lm 5150 lm
System power	3000 K: 30 W 44 W
	4000 K: 30 W 44 W
System efficiency	3000 K: 117 lm/W 115 lm/W
	4000 K: 120 lm/W 117 lm/W
Glare evaluation UGR (4H 8H)	3000 K: 19,7 20,9
	4000 K: 19,8 21
Beam angle	down 115° up 125°
Rated life	50000 h (L90/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	smart+free (Bluetooth)
Voltage	220 - 240 V / 50 Hz, 60 Hz
Inrush current / Inrush current duration	10 A / 200 µs
CIE Flux Code / CEN Flux Code	44 75 93 83 100
Protection class	I
Filament test	960 °C
Impact resistance	IK00
Ambient temperature	-20 °C ... + 45 °C
Conformity mark	CE, EAC

FLAT SLIM disc

312652.0031.730 | Pendant luminaires



Spareparts



982973.002
Replacement LED module



982904.002
Replacement glass