


FLAT POLYMERO

312245.002.4.76 | Pendant luminaires



Pendant luminaires
4051859370437
D 460, H 120

pendant
white

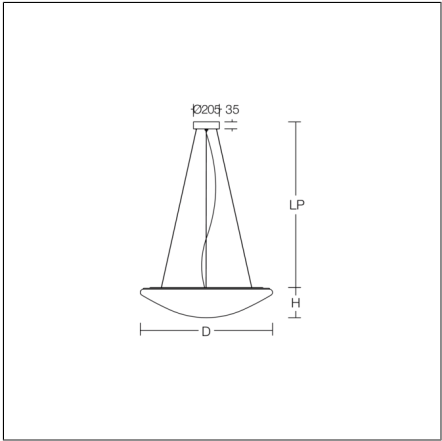

Decorative round LED pendant luminaire. Base and canopy: metal, powder-coated, white. Canopy Ø 205 mm, h 35 mm. Diffuser made of plastic (polycarbonate), opal, shockproof. Diffuser fastening: patented push system. Suitable for pendant. 3-point steel cable suspension, steplessly adjustable. Special lengths available on request. TouchDim sensor capable. Light and/or presence sensors can be integrated.

Product specifications

Diameter D	460 mm
Height H	120 mm
Suspension length LP	200-1300 mm
Weight	4.91 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	3450 lm
System power	32 W
System efficiency	108 lm/W
Glare evaluation UGR (4H 8H)	21,4
Beam angle	down 119° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	230 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	65
Luminaires on B16A fuse	104
Luminaires on C10A fuse	65
Luminaires on C16A fuse	104
Inrush current / Inrush current duration	0.17 A
CIE Flux Code / CEN Flux Code	41 71 89 89 100
Type of protection	IP 40
Protection class	I
Filament test	850 °C
Impact resistance	IK10
Ambient temperature	-20 °C ... + 35 °C
Conformity mark	CE, EAC

FLAT POLYMERO

312245.002.4.76 | Pendant luminaires



Spareparts



08-311165.032
Replacement diffuser