





CorePro LEDspot Reflectors

CoreProLEDspot D 4.5-60W R63 E27 827 36D

CorePro LEDspots Reflectors are a perfect fit for spot lighting and deliver warm halogen-like light. They are compatible with most existing fixtures with a GU10 or E27 base and are designed as a retrofit replacement for halogen or incandescent spots. CorePro LEDspots Reflectors deliver significant energy savings and minimize maintenance cost.

Product data

General Information	
Cap-Base	E27
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Narrow Cone
Light Technical	
Color Code	827 [CCT of 2700K]
Beam Angle (Nom)	36 degree(s)
Luminous Flux	345 lm
Luminous Intensity (Nom)	620 cd
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	76.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	345 lm

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	4.5 W
Lamp Current (Nom)	25 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	80 ℃
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	R63


Datasheet, 2025, March 17 data subject to change

CorePro LEDspot Reflectors

Net Weight (Piece)	0.094 kg
Approval and Application	
Energy Efficiency Class	F
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	5 kWh
EPREL Registration Number	397644
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as	1
per EN 61000-3-3	
Stroboscopic effect visibility measure (SVM)	0.4
	<u> </u>
Application Conditions	<u> </u>
can it be used in closed luminaires	No


CoreProLEDspot D 4.5-60W R63 E27
827 36D
CoreProLEDspot D 4.5-60W R63 E27
827 36D
871869681181800
929001891402
929001891402
1
8718696811818
6
8718696811825

Dimensional drawing




Product	D	С
CoreProLEDspot D 4.5-60W R63 E27 827 36D	63 mm	102 mm

Photometric data




Light Distribution Diagram - CoreProLEDspot D 4.5-60W R63 E27 827 36D

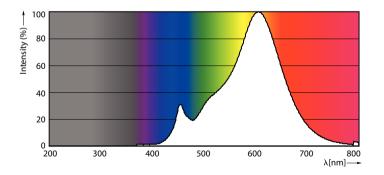

Spectral Power Distribution Colour - CoreProLEDspot D 4.5-60W R63 E27 827 36D

CorePro LEDspot Reflectors


Photometric data




Calculux Reconstruct 4.5 Philips Lighting 8.V. Page: 117

Accent Lighting Spots - CoreProLEDspot D 4.5-60W R63 E27 827 36D

Lifetime

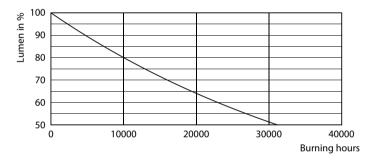

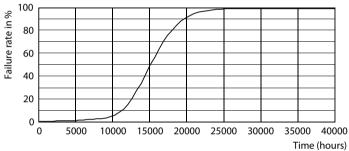

Lumen Maintenance Diagram - CoreProLEDspot D 4.5-60W R63 E27 827 36D

LEDspot CorePro 1.8-30W E14 R39 827 36D ND



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.