

Axyl Greet W

THORN


96701667 AXYL GREETW L U/D 28L 930 WB RD ANT

| | | | | | |
|-------------------------|------|------|---|---|--|
| LED 19W AXYL_GW_L_UD930 | IP65 | IK04 |  |  | |
|-------------------------|------|------|---|---|--|


Axyl Greet W

AXYL Greet W, a wall mounted, architectural LED luminaire for decorative facade lighting, with wide beam up and down distribution. Class III electrical.. DALI-2 dimmable Remote LED driver. , IP65, Impact strength: IK04. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED..


Dimensions: 290 x 105 x 43 mm
Luminaire input power: 18.7 W
Luminaire luminous flux: 873 lm
Luminaire efficacy: 47 lm/W
Weight: 1.66 kg

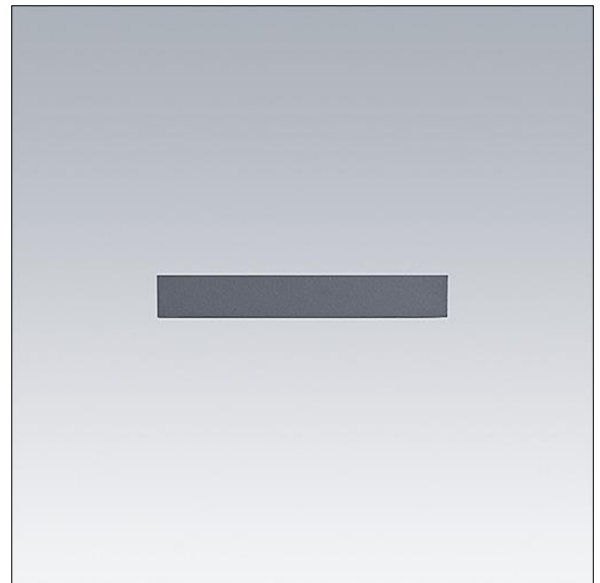

TLG_AXYL_F_GREET_W_L_ANT.jpg

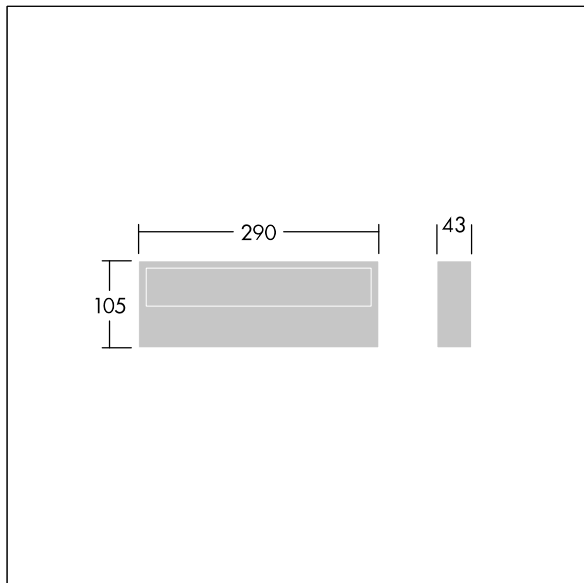

TLG_AXYL_M_GREET_W_L.wmf

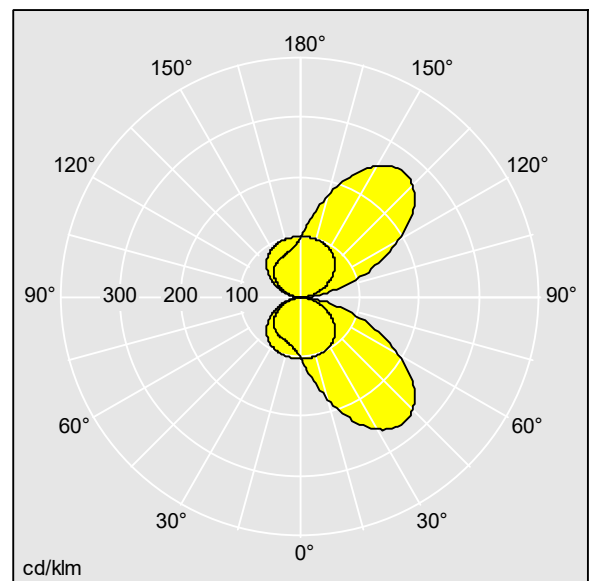

96701667.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 873 lm
Luminaire efficacy*: 47 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated useful life (B10)*:
L80 70000 h at 25 °C
Ballast: 0x LED_DRV
Luminaire input power*: 18.7 W Power factor = 0.99
Dimming: Dali2Dim
LOR: 1,00 ULOR: 0,50 DLOR: 0,50

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting