

Axyl Trim

THORN


96701439 AXYL TRIM S GRID 1L930 A/S RD ANT

LED 3W AXYL_TR_S_GR-AS930	IP65	IK06		CE	
---------------------------	------	------	---	----	--


Axyl Trim

AXYL Trim, a wall recessed, architectural LED luminaire for decorative facade lighting, with asymmetrical distribution. Class III electrical.. DALI-2 dimmable Remote LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED..


Dimensions: 106 x 106 x 98 mm
Luminaire input power: 3.4 W
Luminaire luminous flux: 22 lm
Luminaire efficacy: 6 lm/W
Weight: 0.6 kg

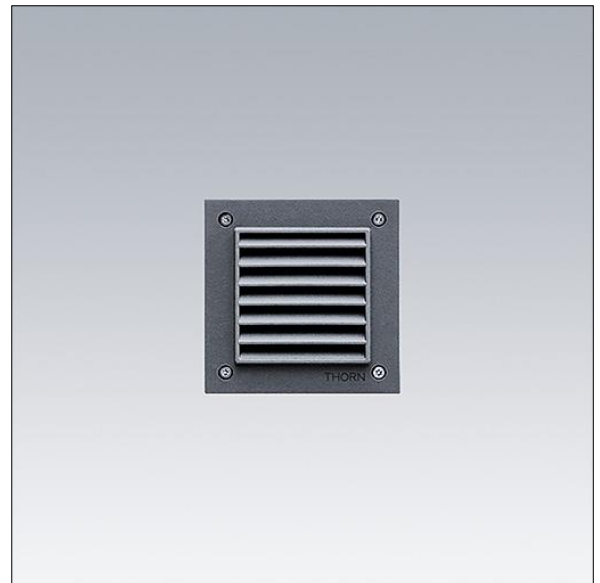

TLG_AXYL_F_TRIM_S_GRID_ANT.jpg

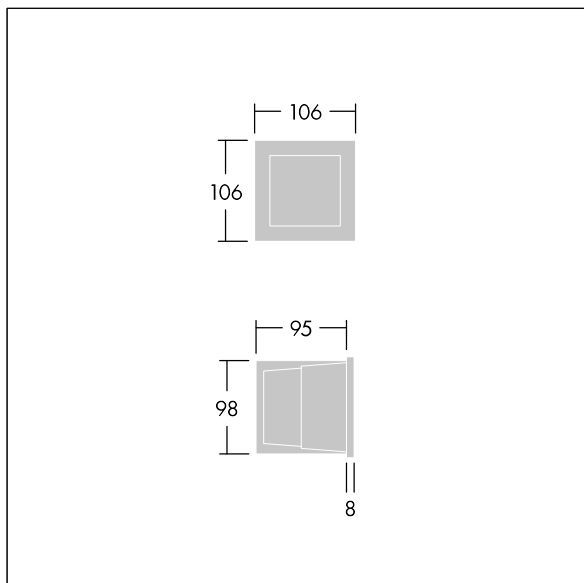

TLG_AXYL_M_TRIM_S.wmf

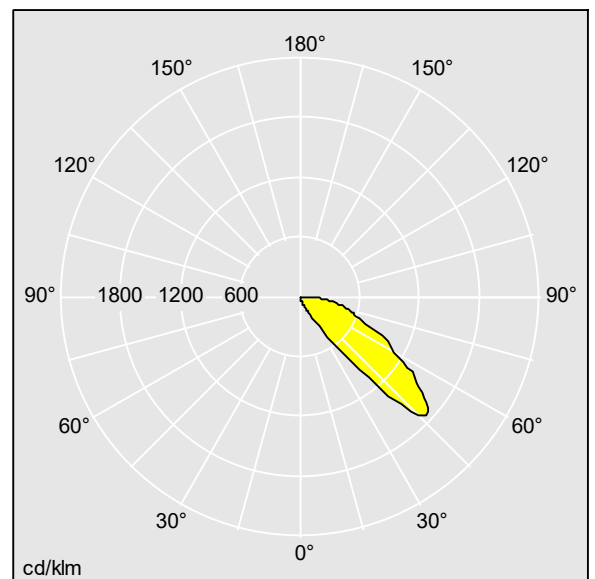

96701439.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 22 lm
Luminaire efficacy*: 6 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated useful life (B10)*:
L80 70000 h at 25 °C
Ballast: 0x LED_DRV
Luminaire input power*: 3.4 W Power factor = 0.4
Dimming: Dali2Dim
LOR: 1,00 ULOR: 0,02 DLOR: 0,98

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting