

# Axyl Greet B

THORN


96700668 AXYL GREETB H870 SE 56L 930 A/S HFX ANT

LED 20W AXYL_GB_SE_930	IP65	IK06			
------------------------	------	------	---	---	--


## Axyl Greet B

AXYL Greet B, a free-standing, decorative LED bollard with asymmetrical distribution. Class II electrical.. DALI-2 dimmable LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED..


Dimensions: 85 x 290 x 870 mm  
 Luminaire input power: 19.5 W  
 Luminaire luminous flux: 877 lm  
 Luminaire efficacy: 45 lm/W  
 Weight: 8.87 kg

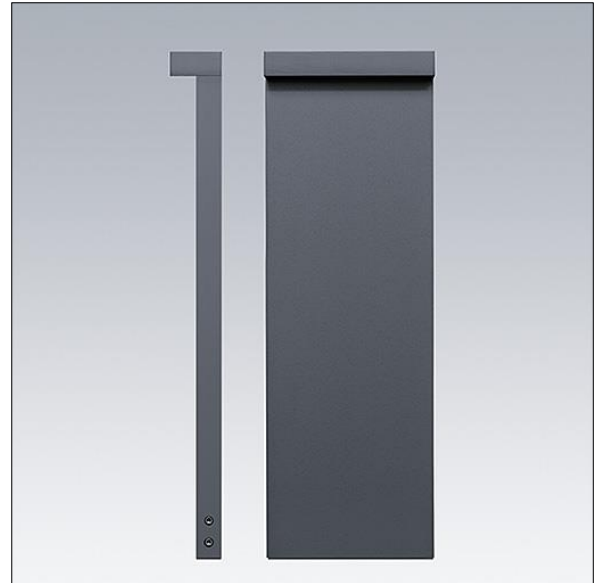

TLG\_AXYL\_F\_GREET\_B\_L\_SE\_ANT.jpg

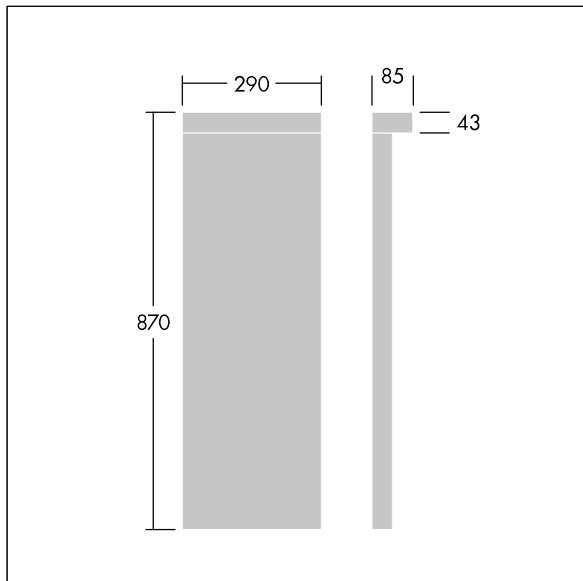

TLG\_AXYL\_M\_GREET\_B\_L\_SE.wmf

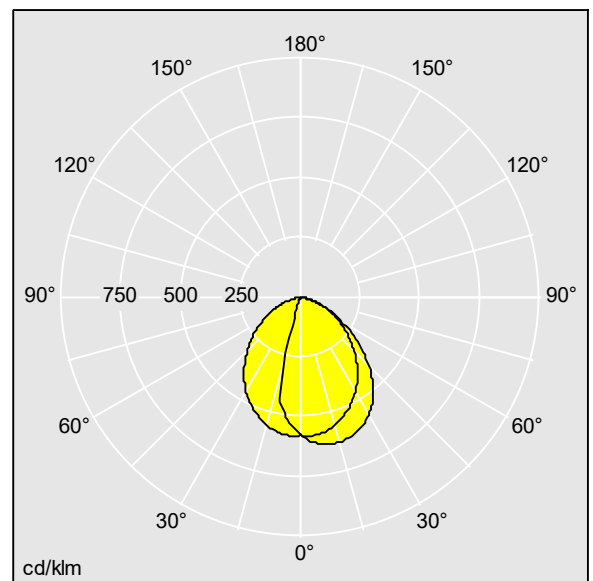

96700668.idt

Lamp position: STD - standard  
 Light Source: LED  
 Luminaire luminous flux\*: 877 lm  
 Luminaire efficacy\*: 45 lm/W  
 Colour Rendering Index min.: 90  
 Correlated colour temperature\*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3  
 Rated useful life (B10)\*:  
 L80 70000 h at 25 °C  
 Ballast: 1x LED\_DRV  
 Luminaire input power\*: 19.5 W Power factor = 0.95  
 Dimming: Dali2Dim  
 LOR: 1,00 ULOR: 0,00 DLOR: 1,00

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
 © Thorn Lighting