


# LIGHTSTREAM maxi

721718.0031 | Spotlights



Spotlights  
4051859012160  
L 501, B 374, H 182

Universal mounting system  
anthracite metallic (DB703)

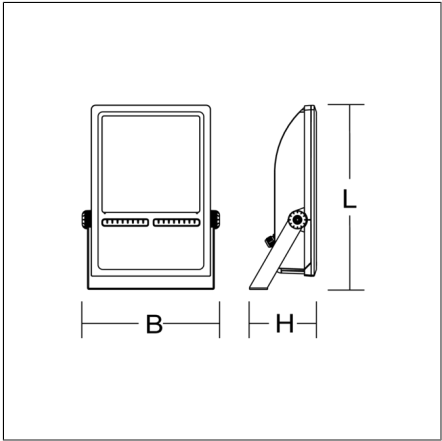

LED floodlight for accent and area lighting. Housing made of corrosion-resistant die-cast aluminium for outdoor use, powder-coated. Bracket stainless steel, powder-coated. Tilt angle can be adjusted and locked in 6° steps with precise angular scale. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Reflector made of high purity aluminium, glossy brightened and anodised. COB LED with socket for easy replacement. Toughened glass cover. Rotationally symmetric medium beam light distribution. Thermally decoupled driver compartment. Quick connection possible without opening the housing by screw-less plug connector on bayonet locked slide. Piano-key terminal up to 5 x 2,5 mm², max cable Ø 13 mm. Windage area Aw = 0.155 m².

### Product specifications

Length L	501 mm
Width B	374 mm
Height H	182 mm
Weight	11.6 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	28900 lm
System power	221 W
System efficiency	131 lm/W
Glare evaluation UGR (4H 8H)	23,8
Beam angle	45°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	2
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B16A fuse	2
Luminaires on C16A fuse	4
Inrush current / Inrush current duration	75 A / 450 µs
CIE Flux Code / CEN Flux Code	84 100 100 100 100
Type of protection	IP 65
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK08
Ambient temperature	-40 °C ... + 35 °C
Safety marks	D-mark
Test marks	ENEC, VDE
Conformity mark	CE, EAC

## Accessories



982052.0031  
Mounting bracket for pole-top installation




982003.0031  
Pole attachment (double): for spigot 76 mm, anthracite metallic (DB703)



982004.0031  
Pole attachment (double): for spigot 89 mm, anthracite metallic (DB703)



982005.0031  
Pole attachment (double): for spigot 108 mm, anthracite metallic (DB703)



982002.0031  
Pole attachment (single): for spigot 76 mm, anthracite metallic (DB703)



982045.0031  
Pole attachment (single): for spigot 60 mm, anthracite metallic (DB703)



982046.0031  
Pole attachment (single): for spigot 89 mm, anthracite metallic (DB703)



982525.0031  
Adapter set for 4-fold configuration (4 x 90°)



982638.003  
Junction box H with strain relief.



982003.000  
Pole attachment (double): for spigot 76 mm, unpainted



982004.000  
Pole attachment (double): for spigot 89 mm, unpainted



982005.000  
Pole attachment (double): for spigot 108 mm, unpainted




982002.000  
Pole attachment (single): for spigot 76 mm, unpainted



982045.000  
Pole attachment (single): for spigot 60 mm, unpainted



982046.000  
Pole attachment (single): for spigot 89 mm, unpainted




982401.0031  
Adapter set for 3-fold configuration (3 x 120°)



982478.0031  
Pole clip for pole diameter 95 - 140 mm

## Spareparts



981984.0031  
Front frame with safety pane