


TX-MOVE

742157.003.1 | Surface mounted projector



Surface mounted projectors
4051859756347
L 569, B 57, H 77

Track on ceiling
deep black, matt (RAL 9005)

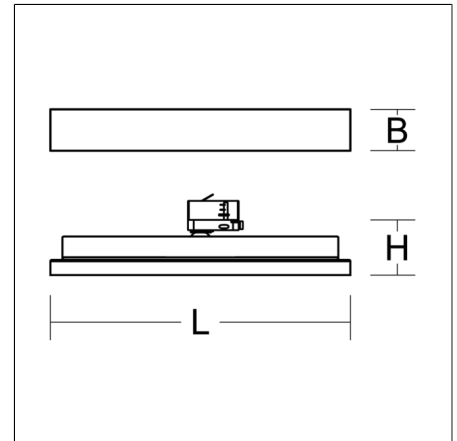

Multifunctional surface-mounted spotlight for area lighting. Very flat design. Housing: sheet steel, powder-coated. Rotation range: 356°. Swivel range: 90°. Consistent alignment possible with visible tilt scale. High-efficiency LED units with optimum light control thanks to clear plastic (PC) lens optics. Special microstructures reduce the yellow corona (caused by chromatic aberration) to an absolute minimum. Symmetrical light distribution. With multi adaptor for 3-circuit tracks 230 V. Suitable for Track on ceiling. MultiLumen: Luminous flux adjustable in 3 steps. Factory setting is the highest luminous flux. Environmentally friendly and resource-saving due to replaceable and recyclable components. Very good glare control, ideal for till areas.

Product specifications

Length L	569 mm
Width B	57 mm
Height H	77 mm
Weight	1.38 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	2850 lm 3900 lm 5450lm
System power	19 W 27 W 40W
System efficiency	136 lm/W 144 lm/W 150lm/W
Glare evaluation UGR (4H 8H)	17,7 18,8 19,9
Beam angle	30°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	15
Luminaires on B16A fuse	24
Luminaires on C10A fuse	24
Luminaires on C16A fuse	40
Inrush current / Inrush current duration	26 A / 270 µs
CIE Flux Code / CEN Flux Code	88 96 99 100 100
Type of protection	IP 20
Protection class	I
Filament test	850 °C
Impact resistance	IK04
Ambient temperature	5 °C ... + 25 °C
Conformity mark	CE

TX-MOVE

742157.003.1 | Surface mounted projector



Accessories



70319.003

Point outlet for 3-circuit multi adaptor