


# BARIS 52 LED BRACKET DIR/IND 860MM 2550/1500LM 830 IP44 I CL. PRM BLACK 24/13W

DETAILED CARD

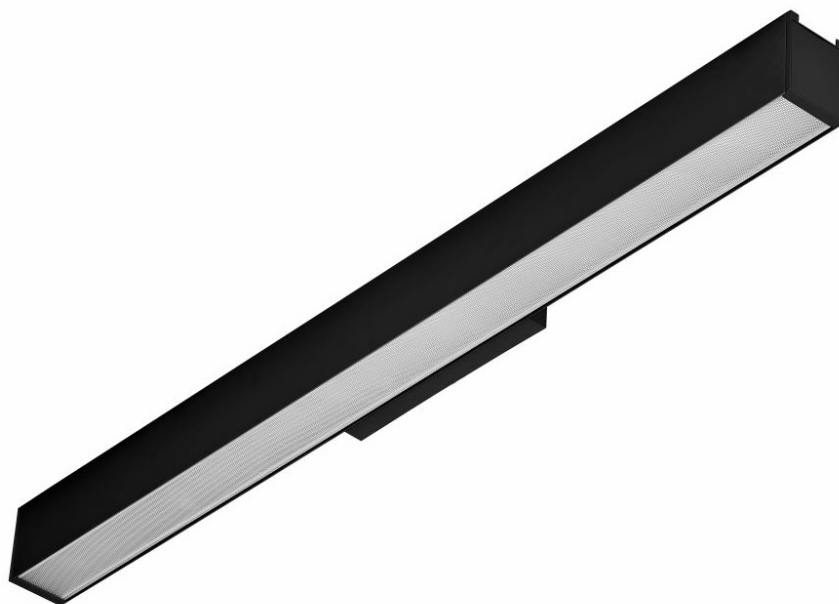

## TECHNICAL PARAMETERS

|                                              |                       |
|----------------------------------------------|-----------------------|
| Rated power [W] - range:                     | 24/13                 |
| Luminous flux of the luminaire [lm] - range: | 2550/1500             |
| Colour temperature [K]:                      | 3000                  |
| Ingress protection:                          | IP44                  |
| Impact resistance:                           | IK03                  |
| Material of the body:                        | aluminium             |
| Colour of the body:                          | black                 |
| Diffuser material:                           | PC                    |
| Diffuser type:                               | PRM                   |
| Mounting version:                            | surface, wall mounted |

## CHARACTERISTICS

Discreet elegance and energy efficiency are the special features of the BARIS 52 LED Bracket lamp family. The housing of the luminaire is made of an anodized aluminum profile in gray or an aluminum profile painted in white or black (other colors available on request). The supplement is a spacer made of plastic. The optical system is crowned with an opal diffuser providing soft light. The optical system in the form of a prismatic diaphragm reduces glare and is characterized by a greater light transmission than the opal cover, which has a direct impact on a higher value of luminous efficacy. The available DIR / IND versions provide up / down two-way light distribution in the proportions 65/35.

## APPLICATION

A unique design predisposes these luminaires to be illuminated: passageways, sanitary rooms, and bathrooms, as well as living rooms and hotel rooms.

The Baris 52 Bracket luminaires perfectly display light paintings, posters or other works hung on the walls.


# BARIS 52 LED BRACKET DIR/IND 860MM 2550/1500LM 830 IP44 I CL. PRM BLACK 24/13W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                                              |               |                            |                                      |
|----------------------------------------------|---------------|----------------------------|--------------------------------------|
| Rated power [W] - range:                     | 24/13         | Colour of the body:        | black                                |
| Index:                                       | 674631        | Diffuser material:         | PC                                   |
| Colour temperature [K]:                      | 3000          | Dimensions (H/W/T/S) [mm]: | 82/69/864                            |
| EAN:                                         | 5905963674631 | Diffuser colour:           | clear                                |
| Luminous flux of the luminaire [lm] - range: | 2550/1500     | Optics:                    | Microprism                           |
| Light source:                                | LED module    | Material of the body:      | aluminium                            |
| Diffuser type:                               | PRM           | Impact resistance:         | IK03                                 |
| Nominal power [W] - range:                   | 25/13         | Ingress protection:        | IP44                                 |
| Supply voltage [V]:                          | 220 - 240     | Mounting version:          | surface, wall mounted                |
| Frequency [Hz]:                              | 50 - 60       | Working temperature [°C]:  | from -25 to +35                      |
| Luminous efficacy [lm/W]:                    | 111           | Net weight [kg]:           | 1.700                                |
| Energy efficiency class:                     | E             | Warranty [years]:          | 5                                    |
| Electrical protection class:                 | I             | CE certificate:            | <a href="#">228/2023</a>             |
| Colour rendering index:                      | >80           | ENEC Certificate:          | <a href="#">PL BBJ/006/2022/M1</a>   |
| SDCM:                                        | ≤ 3           | PZH certificate:           | <a href="#">B-BK-60112-0357/2023</a> |
| LED lifespan L70B50 [h]:                     | 111500        | Manual:                    | <a href="#">Download PDF</a>         |
| LED lifespan L80B20 [h]:                     | 70400         | Plik LDT:                  | <a href="#">Download</a>             |
| LED lifespan L90B10 [h]:                     | 34000         |                            |                                      |

## LIGHT CURVES

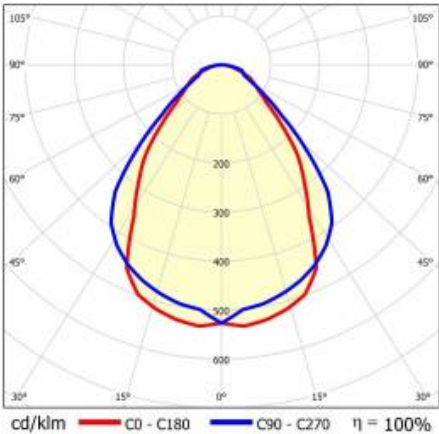

Card creation date: 02 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 228/2023

 **LENA**  
LIGHTING

Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)