

Axyl Geo

THORN


96700519 AXYL GEO H600 1L 930 A/S HFX ANT

LED 16W AXYL_GEO_930	IP65	IK06	⊕	CE	
----------------------	------	------	---	----	--


Axyl Geo

Axyl Geo, a free-standing, decorative LED bollard with asymmetrical distribution. Class I electrical.. DALI-2 dimmable LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +45°C. Complete with 3000K LED..


Dimensions: 120 x 120 x 600 mm
 Luminaire input power: 15.8 W
 Luminaire luminous flux: 587 lm
 Luminaire efficacy: 37 lm/W
 Weight: 6.96 kg

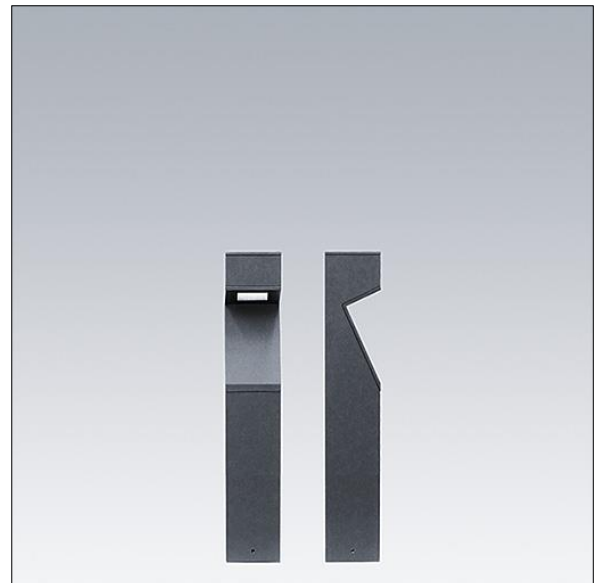

TLG_AXYL_F_GEO_H600_ANT.jpg

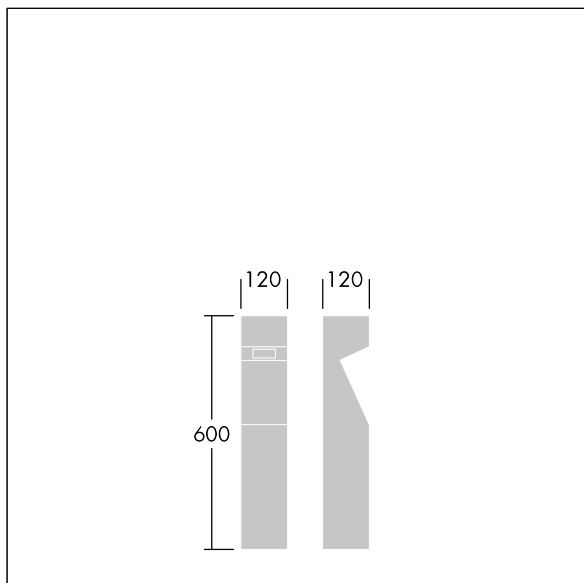

TLG_AXYL_M_GEO_H600.wmf

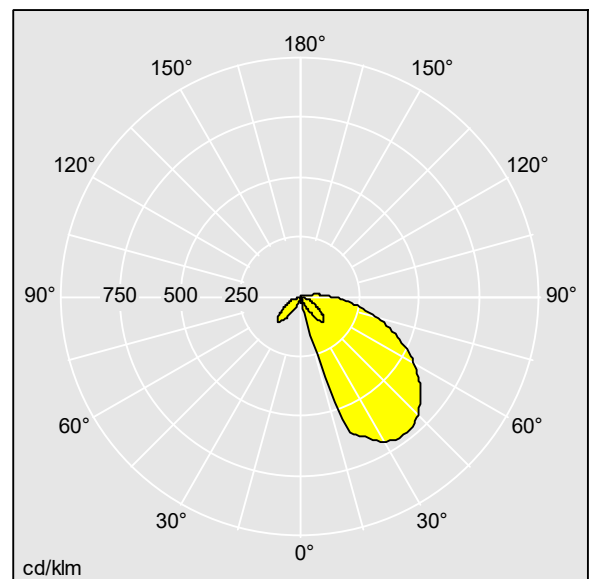

96700519.idt

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 587 lm
 Luminaire efficacy*: 37 lm/W
 Colour Rendering Index min.: 90
 Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
 Rated useful life (B10)*:
 L80 70000 h at 25 °C
 Ballast: 1x LED_DRV
 Luminaire input power*: 15.8 W Power factor = 0.96
 Dimming: Dali2Dim
 LOR: 1,00 ULOR: 0,06 DLOR: 0,94

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting