


Cable junction box

## WKE 4 - Duo 5/3 x 6<sup>2</sup>

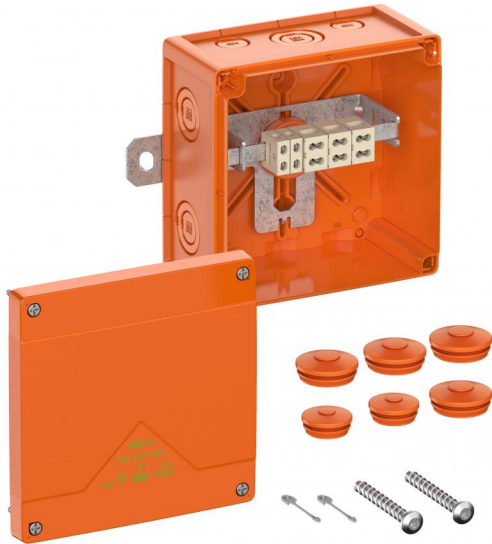

### WKE 4 - Duo 5/3 x 6<sup>2</sup>

Cable junction box

Productnumber: 86771001

Dimensions: 150 x 150 x 85 mm

Cable junction box, with protection class IP66,  $U_i=450V$  AC, certified according to VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22)), UL-EU (EN 62208), Push-out membranes, M20/M25/M32, (2 Rear, 10 Side), External fastening points, with E30 - E 90 electrical functional integrity according to DIN 4102 Part 12. Halogen-free enclosure made of special thermoplastic, terminals made of high-temperature-resistant special ceramic, universally positionable terminal holder

**orange, Connection box, 5-pole, 0.5 - 6 mm<sup>2</sup>, junction box 3-pole 0.5 - 6 mm<sup>2</sup>, number of clampable conductors per pole: 16 x 0.5<sup>2</sup> / 8 x 0.75<sup>2</sup> / 12 x 1<sup>2</sup> / 12 x 1.5<sup>2</sup> / 4 x 2.5<sup>2</sup> / 4 x 4<sup>2</sup> / 4 x 6<sup>2</sup>, in 2-pole pass-through 8 x 0.5<sup>2</sup> / 4 x 0.75<sup>2</sup> / 6 x 1<sup>2</sup> / 6 x 1.5<sup>2</sup> / 2 x 2.5<sup>2</sup> / 2 x 4 / 2 x 6<sup>2</sup>**

**Accessories supplied:**

**Cover retaining straps, screw anchors, 2 off double membrane seals IP66 M25 sealing area 9 - 16 mm, 4 off double membrane seals IP66 M32 sealing area 14 - 21 mm**



## Technical Data

### electrical characteristics

Rated insulation voltage AC:	450 V
Rated insulation voltage DC:	450 V
max. wire cross section (wire branching):	6 mm <sup>2</sup>
Max. conductor cross section:	6 mm <sup>2</sup>
Min. conductor cross section:	0,5 mm <sup>2</sup>
Min. conductor cross section:	0,5 mm <sup>2</sup>
Protection class:	II
Type of protection:	IP66
secured junction:	no
Circuit integrity class:	E30/E60/E90
Number of poles (T-piece):	3
Number of poles (feed-through):	5
UL Type Rating:	other
Number of fuses in T-piece:	0

### Colours

Base unit colour:	orange
Cover colour:	orange

### Additional features

Range of application:	Connectors and T-pieces
-----------------------	-------------------------

### Dimensions

Width:	150 mm
Length:	150 mm
Height:	85 mm
Inner length:	137 mm
Inner width:	137 mm
Inner height:	67 mm

### Material characteristics

suitable for exterior use:	yes
Industry quality:	yes
Halogen free:	yes
Flammability class according with UL94:	V0
Glow-wire flammability according to EN 60695-2-11:	960 °C

### mechanical properties

Type of fastening:	Wall/ceiling mounting
Impact strength:	IK08
Sealable:	yes

### Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-35 °C
Max. ambient temperature:	80 °C
24h ambient temperature:	60 °C

### Material

Base unit material:	Polycarbonate
Cover material:	Polycarbonate
Sealing material:	Polyurethane
Cover screw material:	Stainless steel V2A

### Certificates

Test mark:	VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22))
Test mark:	UL-EU (EN 62208)

## Accessories

[26062001 - DMS M20/or - Double-membrane seals](#)

[26062501 - DMS M25/or - Double-membrane seals](#)

[26063201 - DMS M32/or - Double-membrane seals](#)

[22762001 - KVR M20-MGM/or - Cable gland](#)

[22762501 - KVR M25-MGM/or - Cable gland](#)

[22763201 - KVR M32-MGM/or - Cable gland](#)

[86310001 - WKE BK 1 - Mounting plate](#)

## Cable gland

