




Ceiling and wall luminaires  
4051859166177  
L 230, B 103, H 76

Ceiling mounting, Wall (surface)  
white

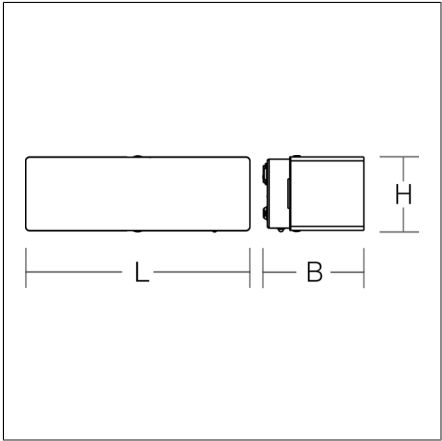

Luminaires for escape route identification Base: metal, powder-coated. Diffuser: plastic (polycarbonate), opal. 4 plastic foils with escape route motifs included (ISO 7010). Electronic ballast included. Self-contained system with automatic self-test and feedback to the RZB monitoring system MULTIDIGIT.

Product specifications

Type of emergency lighting	Self-contained system
Monitoring	MultiDigit
Battery	LiFePO4
Duration	8 h
Operating mode	maintained power mode
Viewing Distance	14 m
Length L	230 mm
Width B	103 mm
Height H	76 mm
Weight	660 g
Light source	LED
Colour temperature	6500 K
System power, mains operation	4,8 W
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 0
Driver	Electronic ballast
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Inrush current / Inrush current duration	120 A / 5000 µs
Type of protection	IP 40
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK03
Ambient temperature for maintained power	0 °C ... + 25 °C
Ambient temperature for non-maintained power mode	5 °C ... + 40 °C
Conformity mark	CE

Spareparts



08-64100  
Replacement diffuser