

Axyl Glow

THORN

96700213 AXYL GLOW L U/D 10L930 WB HF ANT

LED 29W AXYL_GLOW_10L_930	IP65	IK06			
---------------------------	------	------	---	---	--


Axyl Glow

Axyl Glow, a wall mounted, architectural LED luminaire for decorative facade lighting, 2 window with wide beam up and down distribution. Class II electrical.. Fixed output LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +40°C. Complete with 3000K LED..


Dimensions: 140 x 200 x 72 mm
 Luminaire input power: 29.3 W
 Luminaire luminous flux: 1103 lm
 Luminaire efficacy: 38 lm/W
 Weight: 2.36 kg



TLG_AXYL_F_GLOW_L_ANT.jpg

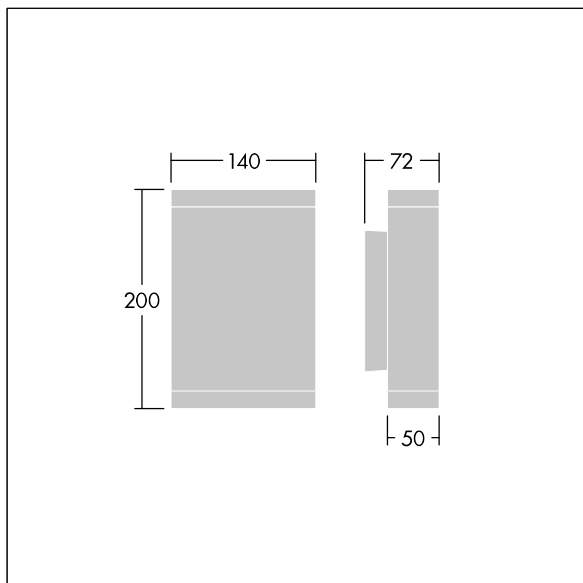

TLG_AXYL_M_GLOW_L_UD.wmf

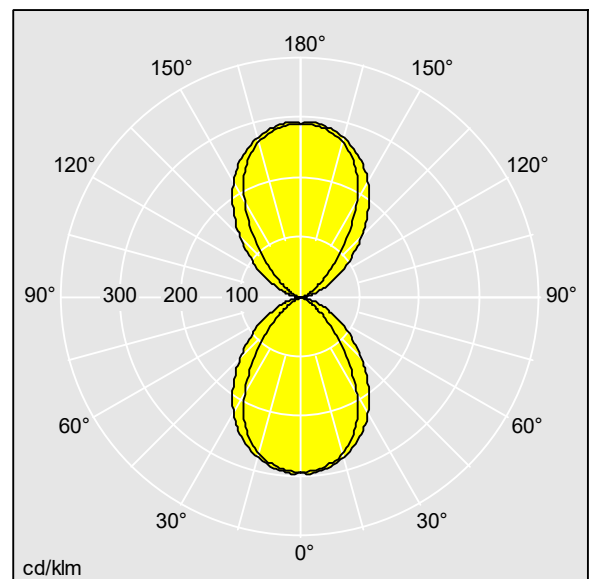

96700213.ltd

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 1103 lm
 Luminaire efficacy*: 38 lm/W
 Colour Rendering Index min.: 90
 Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
 Rated useful life (B10)*:
 L80 70000 h at 25 °C
 Ballast: 1x LED_DRV
 Luminaire input power*: 29.3 W Power factor = 0.95
 Dimming: FIX
 LOR: 1,00 ULOR: 0,50 DLOR: 0,50

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting