

# Axyl Geo

THORN


96700531 AXYL GEO H950 1L 930 A/S HFX ANT

LED 16W AXYL_GEO_930	IP65	IK06			
----------------------	------	------	---	---	--


## Axyl Geo

Axyl Geo, a free-standing, decorative LED bollard with asymmetrical distribution. Class I electrical.. DALI-2 dimmable LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +45°C. Complete with 3000K LED..


Dimensions: 120 x 120 x 950 mm  
Luminaire input power: 15.8 W  
Luminaire luminous flux: 587 lm  
Luminaire efficacy: 37 lm/W  
Weight: 6.96 kg

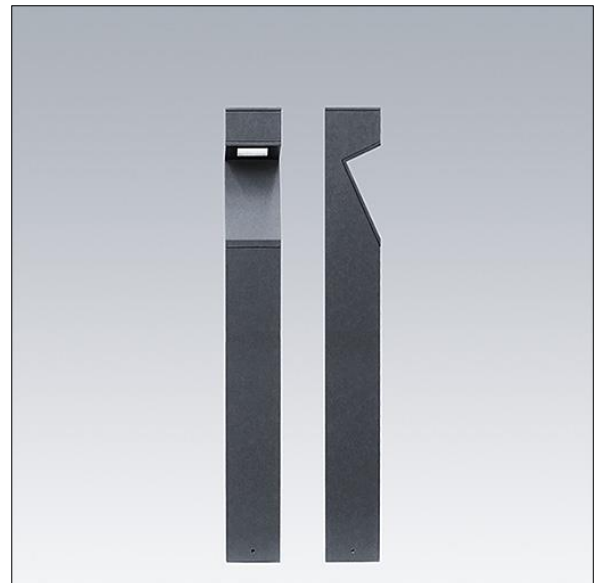

TLG\_AXYL\_F\_GEO\_H950\_ANT.jpg

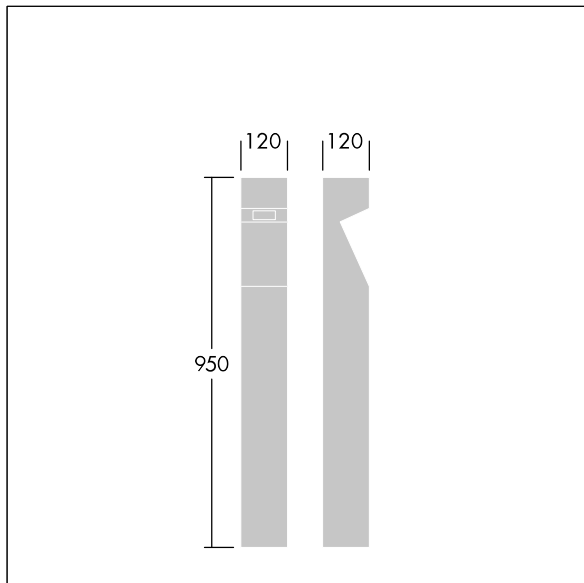

TLG\_AXYL\_M\_GEO\_H950.wmf

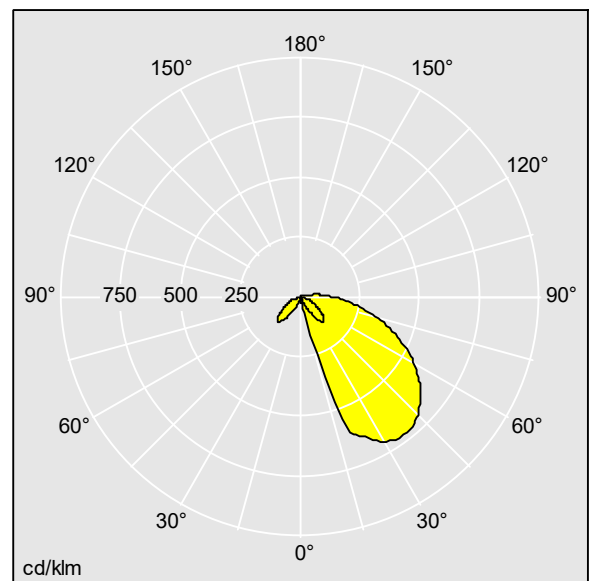

96700531.ltd

Lamp position: STD - standard  
Light Source: LED  
Luminaire luminous flux\*: 587 lm  
Luminaire efficacy\*: 37 lm/W  
Colour Rendering Index min.: 90  
Correlated colour temperature\*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3  
Rated useful life (B10)\*:  
L80 70000 h at 25 °C  
Ballast: 1x LED\_DRV  
Luminaire input power\*: 15.8 W Power factor = 0.96  
Dimming: Dali2Dim  
LOR: 1,00 ULOR: 0,06 DLOR: 0,94

This product contains a light source of energy efficiency class E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting