


FLAT POLYMERO

312097.002.4 | Pendant luminaires



Pendant luminaires
4051859161554
D 620, H 160

pendant
white

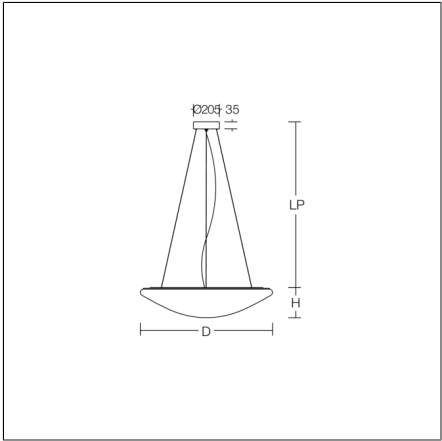

Decorative round LED pendant luminaire. Base and canopy: metal, powder-coated, white. Canopy Ø 205 mm, h 35 mm. Diffuser made of plastic (polycarbonate), opal, shockproof. Diffuser fastening: patented push system. Suitable for pendant. 3-point steel cable suspension, steplessly adjustable. Special lengths available on request.

Product specifications


Diameter D	620 mm
Height H	160 mm
Suspension length LP	350-1300 mm
Weight	7.67 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	3250 lm
System power	29 W
System efficiency	112 lm/W
Glare evaluation UGR (4H 8H)	19,1
Beam angle	down 120° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	Phase cut-off/cut-on
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	53
Luminaires on B16A fuse	85
Luminaires on C10A fuse	53
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	0.2 A / 10000 µs
CIE Flux Code / CEN Flux Code	41 69 88 88 100
Type of protection	IP 40
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK10
Ambient temperature	25 °C
Conformity mark	CE, EAC

FLAT POLYMERO

312097.002.4 | Pendant luminaires



Spareparts



08-311173.042
Replacement diffuser