


TX-MOVE

742160.002.2 | Surface mounted projector



Surface mounted projectors
4051859756835
L 569, B 57, H 77

Track on ceiling
traffic white, matt (RAL 9016)

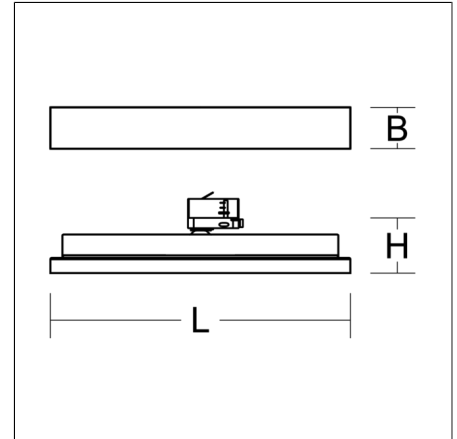

Multifunctional surface-mounted spotlight for area lighting. Very flat design. Housing: sheet steel, powder-coated. Rotation range: 356°. Swivel range: 90°. Consistent alignment possible with visible tilt scale. High-efficiency LED units with flush-mounted opal diffuser made of non-yellowing PMMA. Symmetrical wide beam light distribution. Best colour rendering with CRI ≥90 for fresh products and coloured textiles. With multi adaptor for 3-circuit tracks 230 V. Suitable for Track on ceiling. MultiLumen: Luminous flux adjustable in 3 steps. Factory setting is the highest luminous flux. Environmentally friendly and resource-saving due to replaceable and recyclable components.

Product specifications

Length L	569 mm
Width B	57 mm
Height H	77 mm
Weight	1.38 kg
Light source	LED
Colour temperature	2700 K
Rated luminous flux	1700 lm 2200 lm 2950lm
System power	18 W 24 W 33W
System efficiency	89 lm/W 92 lm/W 94lm/W
Glare evaluation UGR (4H 8H)	26,7 27,6 28,7
Beam angle	112°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	90
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	15
Luminaires on B16A fuse	24
Luminaires on C10A fuse	24
Luminaires on C16A fuse	40
Inrush current / Inrush current duration	26 A / 270 µs
CIE Flux Code / CEN Flux Code	47 79 96 100 100
Type of protection	IP 20
Protection class	I
Filament test	650 °C
Impact resistance	IK03
Ambient temperature	5 °C ... + 25 °C
Conformity mark	CE

TX-MOVE

742160.002.2 | Surface mounted projector



Accessories



70319.002

Point outlet for 3-circuit multi adaptor