




Pendant luminaires
4068754003711
L 1127, B 57, H 75

pendant
silver, matt (approx. RAL 9006)

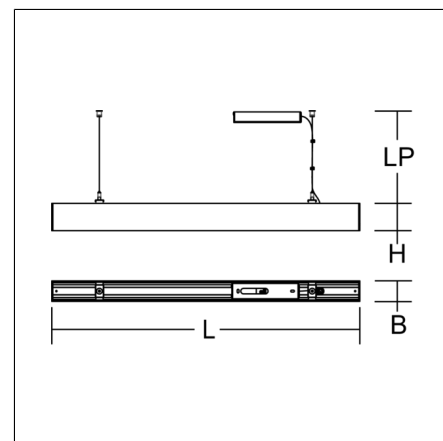

Linear pendant luminaire for aesthetically sophisticated lighting. Housing: extruded aluminium profile, powder-coated. End cap aluminium powder-coated. Canopy made of aluminium, powder-coated. Diffuser made of non-yellowing plastic (PMMA), opal. Suitable for pendant. 2-point steel cable suspension freely positionable and infinitely height-adjustable. Special lengths available on request. LED unit with integrated converter interchangeable and removable. Suitable for through-wiring. With sensors or as a safety luminaire on request.

Product specifications

| | |
|--|--------------------------------|
| Length L | 1127 mm |
| Width B | 57 mm |
| Height H | 75 mm |
| Suspension length LP | 2000 mm |
| Weight | 3.32 kg |
| Light source | LED |
| Colour temperature | #3000 K #3000 K |
| Rated luminous flux | 4600 lm |
| System power | 40 W |
| System efficiency | 115 lm/W |
| Glare evaluation UGR (4H 8H) | 23,3 |
| Beam angle | down 104°/107° up 105°/107° |
| Rated life | 50000 h (L80/B10) |
| Colour rendering index (CRI) | 80 |
| Colour tolerance | 3 |
| Photobiological safety according to EN 62471 | Risk group 1 |
| Driver | Converter |
| Control | on/off |
| Voltage | 220 - 240 V / 50 Hz, 60 Hz |
| Luminaires on B10A fuse | 15 |
| Luminaires on B16A fuse | 25 |
| Luminaires on C10A fuse | 26 |
| Luminaires on C16A fuse | 42 |
| Inrush current / Inrush current duration | 20 A / 200 µs |
| CIE Flux Code / CEN Flux Code | 49 80 96 63 100 |
| Type of protection | IP 20 |
| Protection class | I |
| Filament test | 650 °C |
| Impact resistance | IK03 |
| Ambient temperature | 5 °C ... + 30 °C |
| Conformity mark | CE, EAC |