

# Axyl Trim

THORN

## 96701403 AXYL TRIM L VISO 6L930 A/S RD ANT

LED 11W AXYL_TR_L_VS-AS930	IP65	IK06			
----------------------------	------	------	---	---	--


### Axyl Trim

AXYL Trim, a wall recessed, architectural LED luminaire for decorative facade lighting, with asymmetrical distribution. Class III electrical.. DALI-2 dimmable Remote LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED..


Dimensions: 230 x 102 x 95 mm  
Luminaire input power: 10.9 W  
Luminaire luminous flux: 289 lm  
Luminaire efficacy: 27 lm/W  
Weight: 1.36 kg



TLG\_AXYL\_F\_TRIM\_L\_VISO\_ANT.jpg

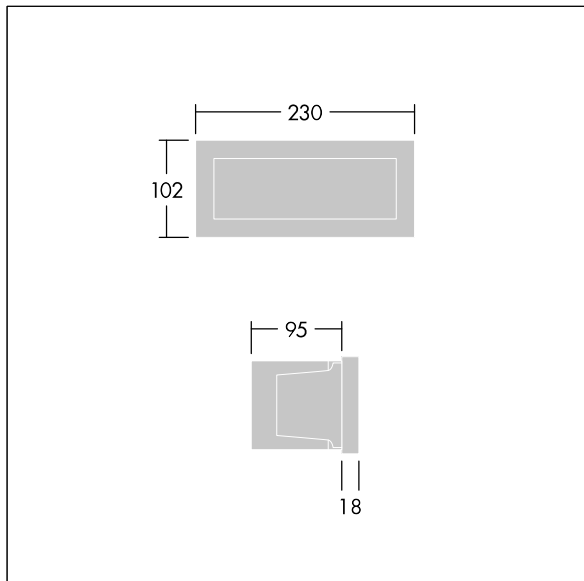

TLG\_AXYL\_M\_TRIM\_L.wmf

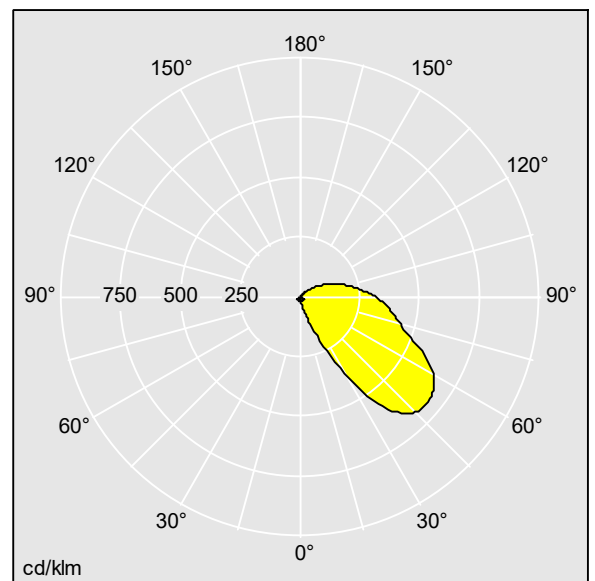

96701403.ltd

Lamp position: STD - standard  
Light Source: LED  
Luminaire luminous flux\*: 289 lm  
Luminaire efficacy\*: 27 lm/W  
Colour Rendering Index min.: 90  
Correlated colour temperature\*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3  
Rated useful life (B10)\*:  
L80 70000 h at 25 °C  
Ballast: 0x LED\_DRV  
Luminaire input power\*: 10.9 W Power factor = 0.94  
Dimming: Dali2Dim  
LOR: 1,00 ULOR: 0,19 DLOR: 0,81

This product contains a light source of energy efficiency class E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting