

ALGINE

SLI035039NW


LED panel ALGINE, with a power of 32 W, high light efficacy 100 lm/W. It is made of high-quality components, supported by a 5-year warranty. Lights up with neutral light - the most universal colour (4000K), which is suitable for the rooms we use on a daily basis, ensuring comfort during everyday activities. Suitable for surface, recessed and suspended mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.



Power	32 W	Voltage	230 V
Luminous flux*	3200 lm (120°)	Colour temperature	4000 K
Colour of light	Neutral white	Beam angle	120 °
IK	06	Degree of protection (IP)	IP20


Technical data

Code	SLI035039NW
Power	32 W
Nominal current	140 mA
Voltage	230 V
Energy efficiency class	E
Energy consumption	32 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	+
Power factor	0.95
Useful luminous flux*	3200 lm (120°)
Luminous flux**	3200 lm (360°)
Lamp efficacy	100 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	120 °
RA	80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	Aluminum, PLASTIC
IK	06
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	595x595x10 mm
Mounting hole	575x575 mm
For use	Inside
Assembly method	Recessed, On the ceiling, Suspended
Application	INT
Made in	PRC
Other	L80B50 50000h MTBF 80000h ,

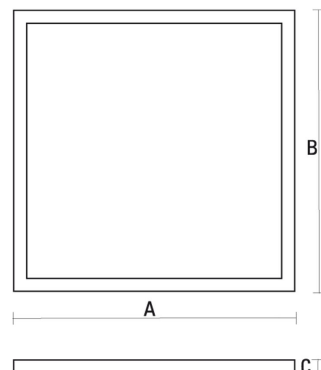

Related documents



 Declaration of Conformity



 Photometric file



 3D model

