


# FLAT SLIM round

312135.004.1.76 | Ceiling and wall luminaires



Ceiling and wall luminaires  
4051859176220  
D 230, H 63

Ceiling mounting, Wall (surface)  
silver, matt (approx. RAL 9006)

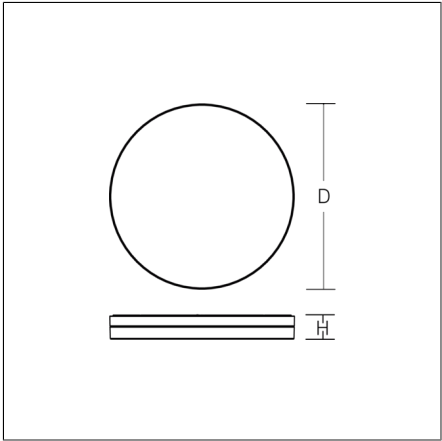

Decorative round LED surface-mounted luminaire for indoor and outdoor use. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Diffuser made of non-yellowing plastic (PMMA), opal. Diffuser fastening: bayonet system. Uniform lighting achieved by the use of LED panel boards. Suitable for Ceiling mounting, Wall (surface). Very easy installation thanks to plug & play connection. The large connection compartment on the back for convenient connections is also ideal for through wiring. TouchDim sensor capable. Light and/or presence sensors can be integrated.

### Product specifications


|                                              |                          |
|----------------------------------------------|--------------------------|
| Diameter D                                   | 230 mm                   |
| Height H                                     | 63 mm                    |
| Weight                                       | 1.14 kg                  |
| Light source                                 | LED                      |
| Colour temperature                           | 4000 K                   |
| Rated luminous flux                          | 1100 lm                  |
| System power                                 | 13 W                     |
| System efficiency                            | 85 lm/W                  |
| Glare evaluation UGR (4H 8H)                 | 22,4                     |
| Beam angle                                   | down 119°<br>up 180°     |
| Rated life                                   | 50000 h (L70/B10)        |
| Colour rendering index (CRI)                 | 80                       |
| Colour tolerance                             | 3                        |
| Photobiological safety according to EN 62471 | Risk group 1             |
| Driver                                       | Converter, dimmable      |
| Control                                      | DALI                     |
| Voltage                                      | 220 - 230 V / 50 - 60 Hz |
| Luminaires on B10A fuse                      | 114                      |
| Luminaires on B16A fuse                      | 182                      |
| Luminaires on C10A fuse                      | 114                      |
| Luminaires on C16A fuse                      | 182                      |
| Inrush current / Inrush current duration     | 0.15 A / 10000 µs        |
| CIE Flux Code / CEN Flux Code                | 43 74 92 91 100          |
| Type of protection                           | IP 65                    |
| Protection class                             | I                        |
| Filament test                                | 650°C - 30 seconds       |
| Impact resistance                            | IK02                     |
| Ambient temperature                          | -20 °C ... + 30 °C       |
| Conformity mark                              | CE, EAC                  |

# FLAT SLIM round

312135.004.1.76 | Ceiling and wall luminaires



## Spareparts



E90-6843.020.1  
Replacement LED module



983179.002  
Replacement diffuser