


LUCIO 2

672529.002 | Stand-by luminaires for escape route illumination



Ceiling luminaires  
4051859721376  
D 110, H 46

Ceiling mounting  
white

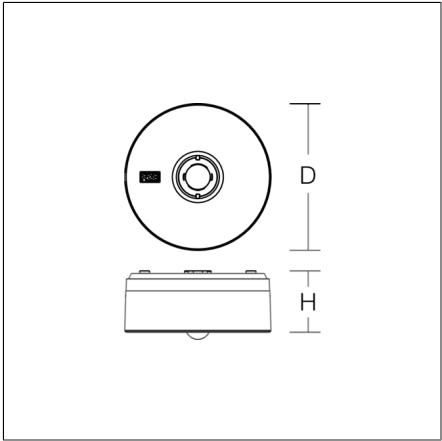

Round surface-mounted downlight. For escape route illumination. Housing: plastic (polycarbonate). Cover: polycarbonate. Plastic lenses for area lighting and escape route illumination included in scope of delivery. Suitable for Ceiling mounting. Suitable for connection to central battery systems.

Product specifications

Type of emergency lighting	Central battery system
Monitoring	Power circuit
Battery	without
Operating mode	non-maintained power mode
Diameter D	110 mm
Height H	46 mm
Weight	0.16 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux, emergency operation	310 lm
System power, emergency operation	4,6 W
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 2
Driver	Electronic ballast
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 Hz, 60 Hz
Luminaires on B10A fuse	30
Luminaires on B16A fuse	40
Luminaires on C10A fuse	30
Luminaires on C16A fuse	40
CIE Flux Code / CEN Flux Code	34 84 99 98 100
Type of protection	IP 20
Protection class	II
Filament test	850 °C
Impact resistance	IK06
Ambient temperature for non-maintained power mode	0 °C ... + 25 °C
Safety marks	Do not cover the recessed luminaire!
Conformity mark	CE

Accessories



982792.002  
Optic lenses



982791.002  
Mounting bracket for surface installation

# LUCIO 2

672529.002 | Stand-by luminaires for escape route illumination



982790.002  
Recessed ceiling housing



983086.000  
Asymmetrical lens for areas to be highlighted



983172.000  
Square area lens for anti-panic lighting