




Pendant luminaires  
4010319991537  
L 350, B 56, H 200

pendant  
silver, matt (approx. RAL 9006)

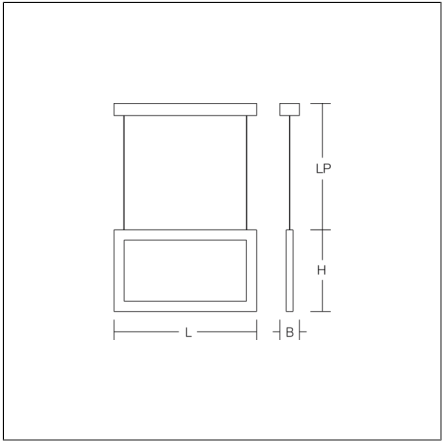

Luminaire for escape route identification. Housing: anodised aluminium, silver. Display panel: patented MicroLens technology and legend on one side. 2-point steel cable suspension, steplessly adjustable. Electronic ballast included. Self-contained system with automatic self-test and feedback to the RZB monitoring system MULTIDIGIT. Please indicate legend number when placing your order!

Product specifications

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Type of emergency lighting                        | Self-contained system    |
| Monitoring                                        | MultiDigit               |
| Battery                                           | NiCd                     |
| Duration                                          | 3 h                      |
| Operating mode                                    | maintained power mode    |
| Viewing Distance                                  | 30 m                     |
| Length L                                          | 350 mm                   |
| Width B                                           | 56 mm                    |
| Height H                                          | 200 mm                   |
| Suspension length LP                              | 500 mm                   |
| Weight                                            | 2.16 kg                  |
| Light source                                      | LED                      |
| Colour temperature                                | 5700 K                   |
| System power, mains operation                     | 4,8 W                    |
| Colour rendering index (CRI)                      | 80                       |
| Colour tolerance                                  | 6                        |
| Photobiological safety according to EN 62471      | Risk group 0             |
| Driver                                            | Electronic ballast       |
| Control                                           | on/off                   |
| Voltage                                           | 220 - 240 V / 50 - 60 Hz |
| Type of protection                                | IP 40                    |
| Protection class                                  | I                        |
| Filament test                                     | 650°C - 30 seconds       |
| Impact resistance                                 | IK03                     |
| Ambient temperature for maintained power          | 0 °C ... + 25 °C         |
| Ambient temperature for non-maintained power mode | 5 °C ... + 40 °C         |
| Conformity mark                                   | CE                       |