


TOLEDO FLAT

901685.002 | Pendant luminaires



Pendant luminaires
4051859344803
D 257, H 89

pendant
white

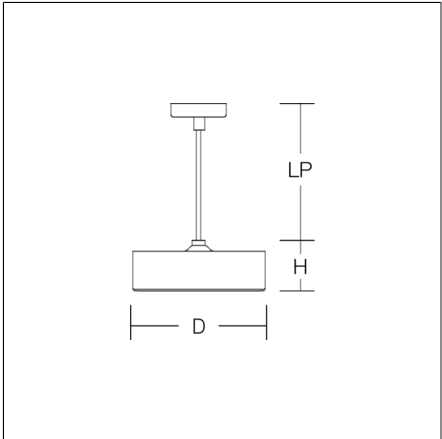

Flat cylindrical pendant luminaire. Cylinder housing sheet steel, powder-coated. Housing: die cast aluminium and sheet steel, powder-coated. Bezel ring: die-cast aluminium, powder-coated. Canopy: sheet steel, powder-coated. Lightguide and diffuser made of non-yellowing plastic (PMMA) opal matt. Suitable for pendant. Transparent suspension cable 2 m, can be shortened. Mounting rings for retrofitting a fabric lampshade available as accessory.

Product specifications

Diameter D	257 mm
Height H	89 mm
Suspension length LP	2000 mm
Weight	2.7 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	1650 lm
System power	17 W
System efficiency	97 lm/W
Glare evaluation UGR (4H 8H)	26,6
Beam angle	110°
Rated life	50000 h (L80/B50)
Colour rendering index (CRI)	80
Colour tolerance	4
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	32
Luminaires on B16A fuse	51
Luminaires on C10A fuse	32
Luminaires on C16A fuse	51
Inrush current / Inrush current duration	7 A / 100 µs
CIE Flux Code / CEN Flux Code	48 79 96 100 100
Type of protection	IP 20
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK06
Ambient temperature	-20 °C ... + 35 °C
Conformity mark	CE, EAC

TOLEDO FLAT

901685.002 | Pendant luminaires



Accessories



982388.002

Mounting ring for fabric lampshades