


# BARIS 52 LED BRACKET 860MM 2750LM 840 IP44 I CL. DALI PLX WHITE 26W

DETAILED CARD

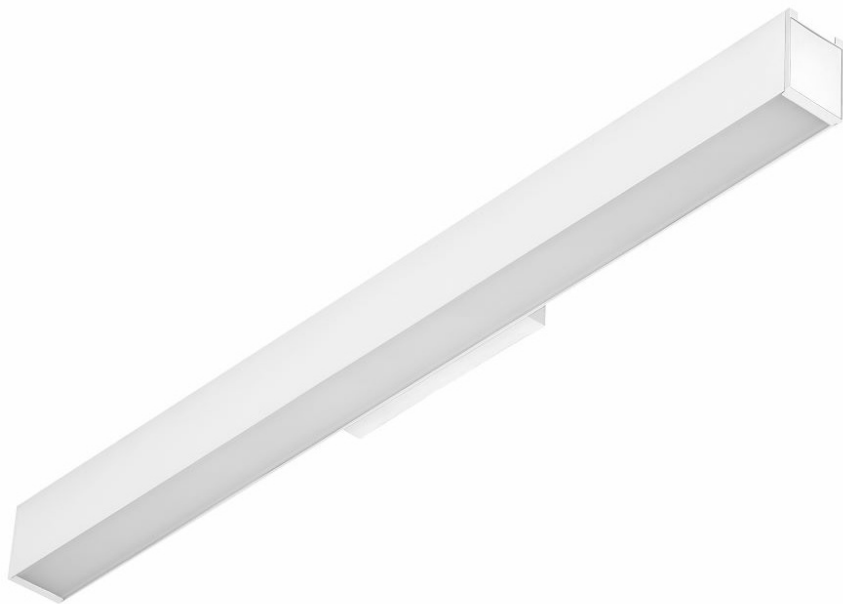

## TECHNICAL PARAMETERS

|                                              |                       |
|----------------------------------------------|-----------------------|
| Rated power [W] - range:                     | 26                    |
| Luminous flux of the luminaire [lm] - range: | 2750                  |
| Colour temperature [K]:                      | 4000                  |
| Ingress protection:                          | IP44                  |
| Impact resistance:                           | IK03                  |
| Material of the body:                        | aluminium             |
| Colour of the body:                          | white                 |
| Diffuser material:                           | PC                    |
| Diffuser type:                               | OPAL                  |
| Mounting version:                            | surface, wall mounted |

## CHARACTERISTICS

Discreet elegance and energy efficiency are the special features of the BARIS 52 LED Bracket lamp family. The housing of the luminaire is made of an anodized aluminum profile in gray or an aluminum profile painted in white or black (other colors available on request). The supplement is a spacer made of plastic. The optical system is crowned with an opal diffuser providing soft light. The optical system in the form of a prismatic diaphragm reduces glare and is characterized by a greater light transmission than the opal cover, which has a direct impact on a higher value of luminous efficacy. The available DIR / IND versions provide up / down two-way light distribution in the proportions 65/35.

## APPLICATION

A unique design predisposes these luminaires to be illuminated: passageways, sanitary rooms, and bathrooms, as well as living rooms and hotel rooms. The Baris 52 Bracket luminaires perfectly display light paintings, posters or other works hung on the walls.

# BARIS 52 LED BRACKET 860MM 2750LM 840 IP44 I CL. DALI PLX WHITE 26W


DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                                              |               |
|----------------------------------------------|---------------|
| Rated power [W] - range:                     | 26            |
| Index:                                       | 675287        |
| Colour temperature [K]:                      | 4000          |
| EAN:                                         | 5905963675287 |
| Luminous flux of the luminaire [lm] - range: | 2750          |
| Light source:                                | LED module    |
| Diffuser type:                               | OPAL          |
| Nominal power [W] - range:                   | 25            |
| Supply voltage [V]:                          | 220 - 240     |
| Frequency [Hz]:                              | 50 - 60       |
| Luminous efficacy [lm/W]:                    | 108           |
| Energy efficiency class:                     | E             |
| Electrical protection class:                 | I             |
| Colour rendering index:                      | >80           |
| SDCM:                                        | ≤ 3           |
| LED lifespan L70B50 [h]:                     | 111500        |
| LED lifespan L80B20 [h]:                     | 70400         |
| LED lifespan L90B10 [h]:                     | 34000         |
| Colour of the body:                          | white         |

|                            |                                      |
|----------------------------|--------------------------------------|
| Diffuser material:         | PC                                   |
| DIMM DALI:                 | yes                                  |
| Dimensions (H/W/T/S) [mm]: | 82/69/864                            |
| Diffuser colour:           | milky                                |
| Optics:                    | no                                   |
| Material of the body:      | aluminium                            |
| Impact resistance:         | IK03                                 |
| Ingress protection:        | IP44                                 |
| Mounting version:          | surface, wall mounted                |
| Working temperature [°C]:  | from -25 to +35                      |
| Control:                   | DALI                                 |
| Net weight [kg]:           | 1.600                                |
| Warranty [years]:          | 5                                    |
| CE certificate:            | <a href="#">228/2023</a>             |
| ENEC Certificate:          | <a href="#">PL BBJ/006/2022/M1</a>   |
| PZH certificate:           | <a href="#">B-BK-60112-0357/2023</a> |
| Manual:                    | <a href="#">Download PDF</a>         |
| Plik LDT:                  | <a href="#">Download</a>             |

## LIGHT CURVES

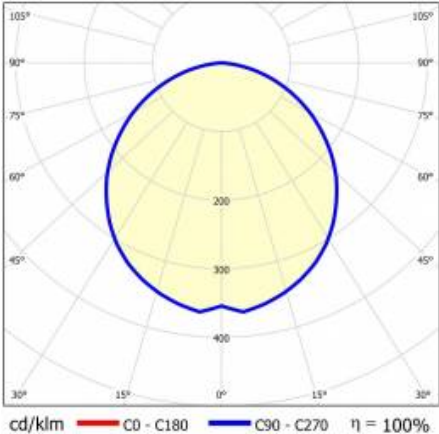

Card creation date: 02 January 2025  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 228/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)