



MASTER - LED HID SON-T



MAS LED SON-T IF 10.8Klm 65W 727 E40

Philips MASTER - LED HID SON-T lamps are an easy LED solution with a short payback period to replace High-Intensity Discharge (HID) and High-Pressure Sodium (SON) lamps. MASTER – LED HID SON-T solutions bring the energy efficiency and long lifetime benefits of LED to HID replacement, providing instant savings for a low initial investment. With the right lamp size and light distribution, you can easily retrofit MASTER – LED HID SON-T lamps into existing SON and SON-T systems, enhancing the lighting quality with LED without changing the luminaire’s ballast (for IF replacements) or reflector.

Warnings and Safety

- Please refer to the installation guide or consult a Philips Lighting representative for the wiring diagram and instructions.

Product data

General Information	
Cap-Base	E40
Nominal lifetime	70,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Sphere
Light Technical	
Color Code	727 [CCT of 2700K]
Luminous Flux	10,800 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	166 lm/W
Color Consistency	<6

Color rendering index (CRI)	70
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	50 Hz
Input Frequency	50 Hz
Power Consumption	65 W
Lamp Current (Nom)	1,760 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	-
Voltage (Nom)	80-90 V
Ballast Compatibility	EM

MASTER - LED HID SON-T

Inrush current at mains	-
Max. lamp no. on MCB B type 10A - Mains	-
Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	4
Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	8
Max. lamp no. on MCB B type 16A - Mains	-
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	6
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	12

Temperature

T-Case Maximum (Nom)	55 °C
----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	T70
Net Weight (Piece)	0.490 kg


Approval and Application

Energy Efficiency Class	D
Energy Consumption kWh/1000 h	65 kWh
EPREL Registration Number	1077807
CE mark	Yes
EU RoHS compliant	Yes
Ambient temperature range	-30 to +45 °C

Product Data

Order product name	MAS LED SON-T IF 10.8Klm 65W 727 E40
Full product name	MAS LED SON-T IF 10.8Klm 65W 727 E40
Full product code	871951444899500
Order code	929003467612
Material Nr. (12NC)	929003467612
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514448995
Numerator - Packs per outer box	6
EAN/UPC - Case	8719514449008



Dimensional drawing



Product	D	C
MAS LED SON-T IF 10.8Klm 65W 727 E40	71 mm	262 mm


MASTER - LED HID SON-T

Photometric data

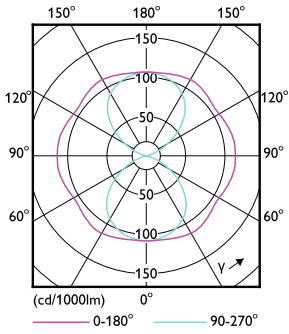


Light Distribution Diagram - MAS LED SON-T IF 10.8Klm 65W 727 E40

General uniform lighting - MAS LED SON-T IF 10.8Klm 65W 727 E40

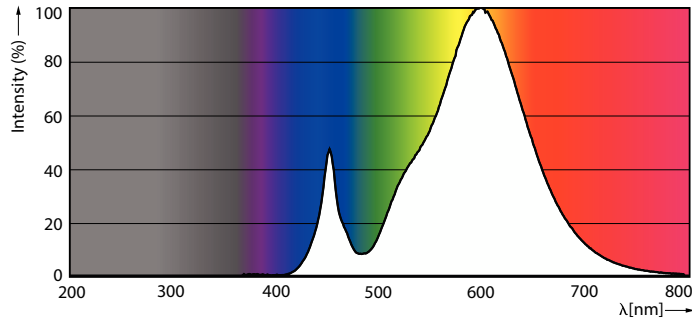


Spectral Power Distribution Colour - MAS LED SON-T IF 10.8Klm 65W 727 E40

Lifetime

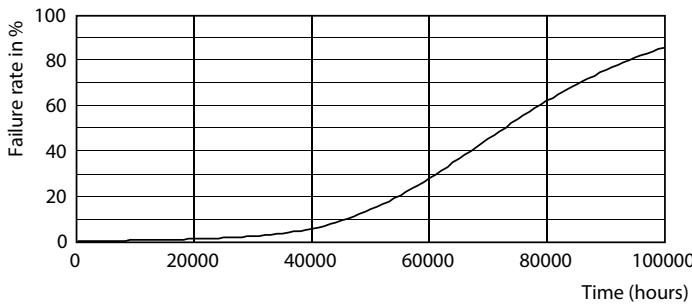

Life Expectancy Diagram

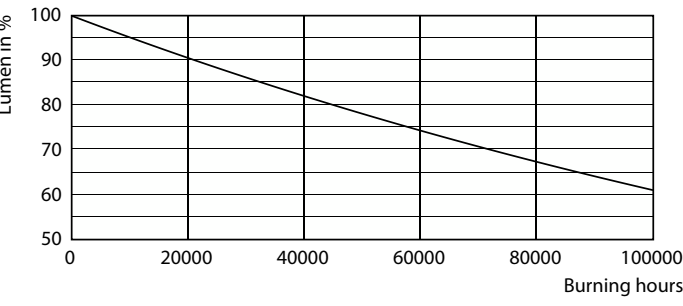

Lumen Maintenance Diagram - MAS LED SON-T IF 10.8Klm 65W 727 E40

MASTER - LED HID SON-T

