




Extensions  
4051859987642  
L 250, B 125, H 140

Wall (surface)  
traffic white, matt (RAL 9016)

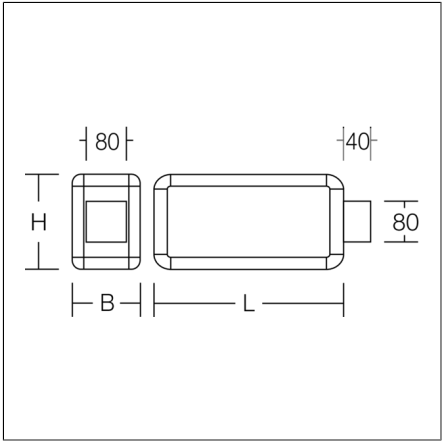

Rectangular wall extension luminaire in classic design. For escape route identification. Housing: aluminium, with plastic corner connectors. Display panels: plastic, opal, with motifs on one side/on both sides. Wall extension Electronic ballast included. Self-contained system with automatic self-test. Please indicate legend number when placing your order!

Product specifications

|   |                            |
|---|----------------------------|
| Type of emergency lighting                        | Self-contained system      |
| Monitoring  | Autotest                   |
| Battery   | LiFePO4                    |
| Duration  | 1 h, 3 h, 8 h              |
| Operating mode                                    | maintained power mode      |
| Viewing Distance                                  | 21 m                       |
| Length L  | 250 mm                     |
| Width B   | 125 mm                     |
| Height H  | 140 mm                     |
| Projection AL                                     | 40 mm                      |
| Weight  | 1.45 kg                    |
| Light source                                      | LED                        |
| Colour temperature                                | 4000 K                     |
| System power, mains operation                     | 4,5 W   undefined W        |
| Photobiological safety according to EN 62471      | Risk group 1               |
| Driver  | Converter                  |
| Control   | on/off                     |
| Voltage   | 220 - 240 V / 50 Hz, 60 Hz |
| CIE Flux Code / CEN Flux Code                     | 29 57 81 65 100            |
| Type of protection                                | IP 44                      |
| Protection class                                  | I                          |
| Filament test                                     | 650 °C                     |
| Impact resistance                                 | IK03                       |
| Ambient temperature for maintained power          | 0 °C ... + 25 °C           |
| Ambient temperature for non-maintained power mode | 5 °C ... + 40 °C           |
| Conformity mark                                   | CE                         |