




Recessed projectors  
4051859923619  
L 597, B 190, H 39

Lay-in luminaires  
traffic white, matt (RAL 9016)

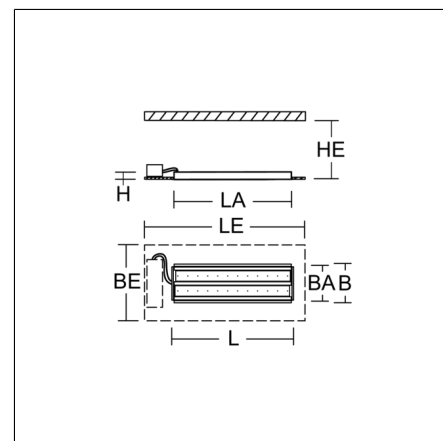

Einlege/Einbau-Flächenstrahler. Housing: sheet steel, powder-coated. 2xSwivel range: 90°. High-efficiency LED units with flush-mounted opal diffuser made of non-yellowing PMMA. Symmetrical wide beam light emission. Suitable for laying in grid ceiling module 600. Connected converter included in separate gearbox. Suitable for through-wiring. MultiLumen: Luminous flux adjustable in 3 steps. Accessories: Mounting frame for installation in suspended ceilings. Environmentally friendly and resource-saving due to replaceable and recyclable components.

### Product specifications

Length L	597 mm
Width B	190 mm
Height H	39 mm
Cut-out length LA	578 mm
Cut-out width BA	174 mm
Installation space length LE	675 mm
Installation space width BE	390 mm
Installation space height HE	100 mm
Weight	3.55 kg
Light source	LED
Colour temperature	2700 K
Rated luminous flux	3500 lm   4500 lm   5850lm
System power	32 W   43 W   62W
System efficiency	94 lm/W   105 lm/W   109lm/W
Glare evaluation UGR (4H 8H)	26,8   27,7   28,6
Beam angle	112°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	90
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Electronic ballast, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	15
Luminaires on B16A fuse	25
Luminaires on C10A fuse	26
Luminaires on C16A fuse	42
Inrush current / Inrush current duration	10 A / 50 µs
CIE Flux Code / CEN Flux Code	47 79 96 100 100
Type of protection	IP 20 on room side IP 20
Protection class	I
Filament test	650 °C
Impact resistance	IK03
Ambient temperature	5 °C ... + 25 °C
Conformity mark	CE

# TX-MOVE

901735.002.2.76 | Recessed projectors



## Accessories



982867.002

Mounting frame for installation in suspended ceilings.