

WALL MAX

WALL-MOUNTED EFFECT LIGHT | 2 WIDE BEAMS

STL22737PTO/30



15W


Power

1200lm
(600lm/600lm)lm

Luminous flux

90° / 90°


Beam angle




TECHNICAL SPECIFICATIONS TABLE

Beam angle	90° / 90°
Power factor	0,92
Luminous flux	1200lm (600lm/600lm)
Frequency	50/60Hz
Ingress protection rating (IP)	IP65
CRI (Color rendering index)	80
Power	15W
Correlated color temperature (CCT)	3000K
Voltage (V)	100-240V
Voltage (Vac)	100-240Vac
Lifespan	25000h

Technical Drawing



Graphics

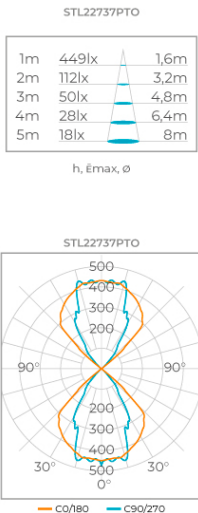

OTHER INFORMATION

Finishing	Black
Color temperature	Warm white
Dimmable	No
Warranty	2 years
Patent information	Patented product
Prevailing material	Aluminum

DOWNLOADS

MANUAL Wall Max

SKETCHUP - STELLA - STL22737BR-30 - STL22737PTO-30 - WALL MAX_PACK.zip

REVIT - STL22737BR_PTO_30.rfa

