



# FLAT POLYMERO KREIS

672344.002.6 | Combined luminaires for escape route illumination

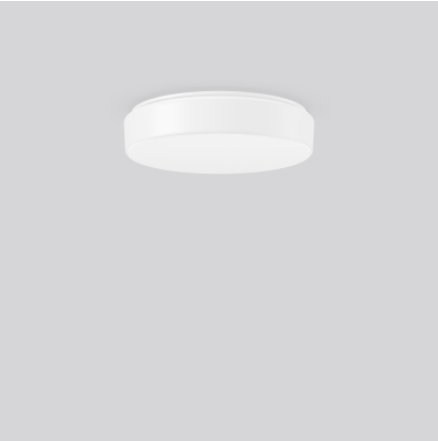

Ceiling and wall luminaires  
4051859721505  
D 360, H 87

Ceiling mounting, Wall (surface)  
white

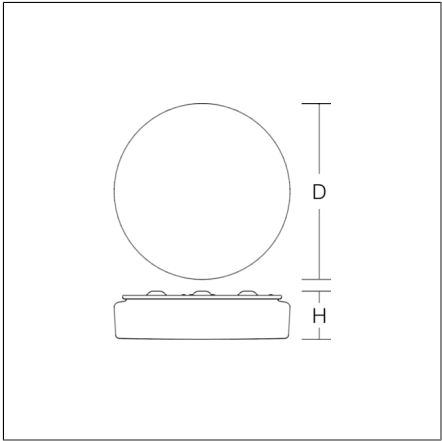

Decorative round surface-mounted luminaire. For escape route illumination. Base: metal, powder-coated. Diffuser made of plastic (polycarbonate), opal, shockproof. Diffuser fastening: patented push system. Suitable for Ceiling mounting, Wall (surface). Driver integrated. Suitable for connection to central battery systems.

### Product specifications

Typ of emergency lighting	Central battery system
Monitoring	Power circuit
Battery	without
Operating mode	maintained power mode
Diameter D	360 mm
Height H	87 mm
Weight	1.31 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux, mains operation	1750 lm
System power, mains operation	14 W
Rated luminous flux, emergency operation	1750 lm
System power, emergency operation	14 W
System efficiency	125 lm/W
Glare evaluation UGR (4H 8H)	20,1
Beam angle	down 119° up 180°
Colour rendering index (CRI)	80
Colour tolerance	4
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	5 A / 50 µs
CIE Flux Code / CEN Flux Code	43 73 91 87 100
Type of protection	IP 40
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK10
Ambient temperature for maintained power	-25 °C ... + 30 °C
Ambient temperature for non-maintained power mode	-25 °C ... + 35 °C
Conformity mark	CE