

Extra Light 55 W 12 V PX26d

Car lamps from NEOLUX ensure the roads ahead are well-lit and visible to others.



Product family benefits

- Better visibility
- Remarkable illumination
- Extra light enables drivers to see farther and thereby allows greater reaction time
- Earlier recognition of risks, barriers, and signs
- Affordable

Product family features

- Up to 50 % extra light
- High performance
- More brightness
- ECE certified lamps
- Good and reliable quality thanks to German technology

Areas of application

- Headlight
- Ideal for use in clear-glass headlights

Product datasheet






ectrical data wer input st voltage minal wattage minal voltage otometrical data minous flux minous flux tolerance mensions & weight oduct weight mgth meter espan espan Tc espan B3	58 W 13.2 V 55.00 W 12.0 V 1550 lm ±10 % 12.50 g 59.0 mm 12.0 mm
wer input st voltage minal wattage minal voltage otometrical data minous flux minous flux tolerance mensions & weight oduct weight mgth meter espan espan Tc	13.2 V 55.00 W 12.0 V 1550 lm ±10 % 12.50 g 59.0 mm 12.0 mm
st voltage minal wattage minal voltage otometrical data minous flux minous flux tolerance mensions & weight oduct weight ngth ameter espan espan Tc	13.2 V 55.00 W 12.0 V 1550 lm ±10 % 12.50 g 59.0 mm 12.0 mm
minal wattage minal voltage otometrical data minous flux minous flux tolerance mensions & weight oduct weight ngth ameter espan espan Tc	55.00 W 12.0 V 1550 lm ±10 % 12.50 g 59.0 mm 12.0 mm
minal voltage otometrical data minous flux minous flux tolerance mensions & weight oduct weight mgth ameter espan espan Tc	1550 lm ±10 % 12.50 g 59.0 mm 12.0 mm
minous flux minous flux tolerance mensions & weight oduct weight mgth meter espan espan Tc	±10 % 12.50 g 59.0 mm 12.0 mm
minous flux minous flux tolerance mensions & weight oduct weight mgth meter espan espan Tc	±10 % 12.50 g 59.0 mm 12.0 mm
minous flux tolerance mensions & weight oduct weight ngth ameter espan espan Tc	±10 % 12.50 g 59.0 mm 12.0 mm
espan Tc	59.0 mm 12.0 mm
espan Tc	59.0 mm 12.0 mm
espan Tc	59.0 mm 12.0 mm
espan espan Tc	12.0 mm
espan espan Tc	220 h
espan Tc	
•	
espan B3	150 h
ditional product data	
se (standard designation)	PX26d
pabilities	
chnology	Halogen lamp
rtificates & standards	
E category	H7
tish standard	477/499
LISTI Standard	7//7/
gistical data	NAOOFI
der reference	N499EL
vironmental information	
te of Declaration	19-01-2022
mary Article Identifier	4008321545725 4008321761132 4008321765819 4008321771339 4006584825707 4052899466357 4052899501096 4055462203021 405289998780 4055462241290 4055462241290 405546224301
ndidate List Substance 1	No declarable substances contain
claration No. in SCIP database	In work

Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N499EL	4052899466357	Folding box	1
N499EL-2SCB	4052899501096	Soft cover box	2

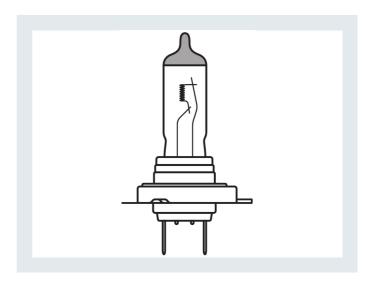

Legal advice

Compared to minimum ECE R112/R37 requirements



NEOLUX Automotive Lighting OSRAM GmbH

Marcel-Breuer-Str 6 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020

www.neolux-lighting.com