


# BEAMLINE SLIM

742171.0025.2 | Surface mounted projector

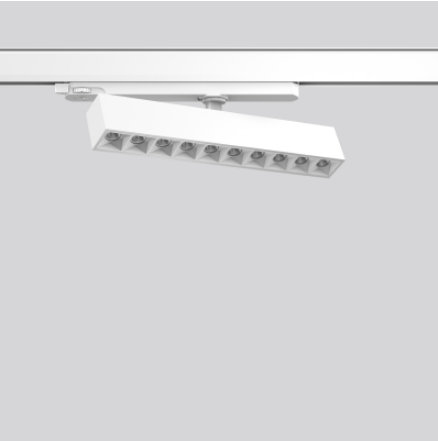

Surface mounted projectors  
4051859744856  
L 285, B 35, H 80

Track on ceiling, Wall track  
traffic white, matt (RAL 9016)



Linear surface mounted projector for aesthetically sophisticated lighting. Housing: metal, powder-coated. Perfect heat management with an aluminium heat sink. Rotation range: 356°. Swivel range: 90°. LED light unit with MRS technology: Mini-Reflector-System made of metallised thermoplastic with prismatic white glare-suppressing frame for pleasant glare-free light (UGR < 10). Medium beam light distribution.. With multi adaptor for 3-circuit tracks 230 V. Suitable for Track on ceiling, Wall track. Converter integrated in the adapter.

### Product specifications

|                                              |                          |
|----------------------------------------------|--------------------------|
| Length L                                     | 285 mm                   |
| Width B                                      | 35 mm                    |
| Height H                                     | 80 mm                    |
| Weight                                       | 0.565 kg                 |
| Light source                                 | LED                      |
| Colour temperature                           | 4000 K                   |
| Rated luminous flux                          | 2150 lm                  |
| System power                                 | 25 W                     |
| System efficiency                            | 86 lm/W                  |
| Glare evaluation UGR (4H 8H)                 | 5,9                      |
| Beam angle                                   | 28°                      |
| Rated life                                   | 50000 h (L80/B10)        |
| Colour rendering index (CRI)                 | 90                       |
| Colour tolerance                             | 3                        |
| Photobiological safety according to EN 62471 | Risk group 1             |
| Driver                                       | Converter                |
| Control                                      | on/off                   |
| Voltage                                      | 220 - 240 V / 50 - 60 Hz |
| Luminaires on B10A fuse                      | 33                       |
| Luminaires on B16A fuse                      | 53                       |
| Luminaires on C10A fuse                      | 53                       |
| Luminaires on C16A fuse                      | 84                       |
| Inrush current / Inrush current duration     | 9.5 A / 16 µs            |
| CIE Flux Code / CEN Flux Code                | 100 100 100 100 100      |
| Type of protection                           | IP 20                    |
| Protection class                             | II                       |
| Impact resistance                            | IK06                     |
| Ambient temperature                          | 25 °C                    |
| Conformity mark                              | CE, EAC                  |