


SQ 1200 3950LM PRM I CL. IP20 1192X292MM 840 (32W)

DETAILED CARD

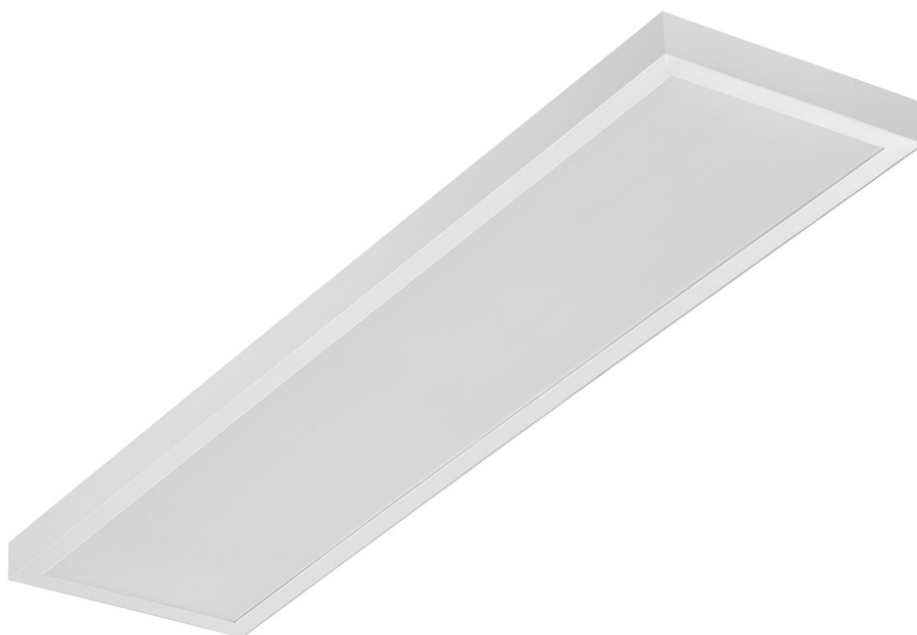

TECHNICAL PARAMETERS

Index:	412240
Ingress protection:	IP20
Nominal power [W]:	32
Luminous flux [lm]*:	3950
Colour temperature [K]:	4000
Colour rendering index:	>80
SDCM:	≤ 5
Energy efficiency class:	D
Material of the body:	ABS
Diffuser material:	PS

CHARACTERISTICS

The SQ 1200 LED is a new line of rectangular raster lights. Designed from the ground up, the design introduces new solutions to ensure excellent light performance. The body is made of plastic for low weight. The diffuser provides the lamp with excellent light characteristics. Integrated LED module Ensures low power consumption and all the advantages of modern LED lamps.

Degree of protection - dependent on mounting method:

- surface-mounted - IP20,
- flush-mounted - IP44/20.


APPLICATION

Surface-mounted luminaire with the possibility of flush-mounting in modular ceilings and in plasterboard ceilings (using a KG frame/adaptor) is particularly recommended for office areas, spacious corridors and public spaces.

DETAILED CARD

Nominal power [W]:	32
Index:	412240
Colour temperature [K]:	4000
EAN:	5905963412240
Luminous flux [lm]:	3950
Light source:	LED module
Diffuser type:	PRM
Supply voltage [V]:	220-240
Frequency [Hz]:	50-60
Luminous efficacy [lm/W]:	116
Energy efficiency class:	D
Electrical protection class:	I
Colour rendering index:	>80
SDCM:	≤ 5
Power factor:	0.94
Beam angle [°]:	120
Diffuser material:	PS
Diffuser colour:	clear
Material of the body:	ABS
Colour of the body:	white

LIGHT CURVES

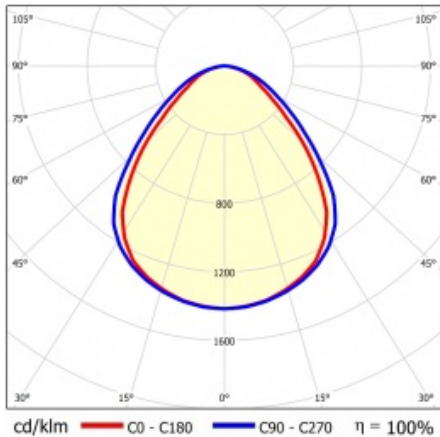

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

