


SIDELITE ECO

312375.002.1.76 | Surface-mounted luminaires



Ceiling and wall luminaires
4051859329015
L 295, B 295, H 46

Ceiling mounting, Wall (surface)
white

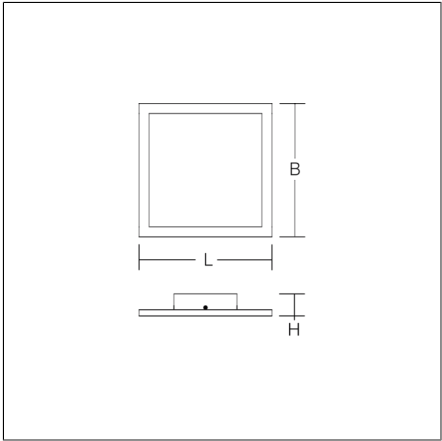

Highly economical surface mounted luminaire with progressive LED technology. Luminaire frame: aluminium, powder-coated. Mounting frame: sheet steel, powder-coated. Diffuser: plastic, opal. Lightguide and diffuser made of non-yellowing plastic (PMMA). Lateral light emission (RZB SIDELITE® technology) for homogeneous light distribution.

Product specifications

Length L	295 mm
Width B	295 mm
Height H	46 mm
Weight	1.28 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	2200 lm
System power	19 W
System efficiency	116 lm/W
Glare evaluation UGR (4H 8H)	25,1
Beam angle	115°/111°
Rated life	50000 h (L80/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B10A fuse	18
Luminaires on B16A fuse	28
Inrush current / Inrush current duration	15 A / 220 µs
CIE Flux Code / CEN Flux Code	47 79 96 100 100
Type of protection	IP 40
Protection class	II
Impact resistance	IK03
Ambient temperature	-20 °C ... + 30 °C
Conformity mark	CE, EAC