



Camini

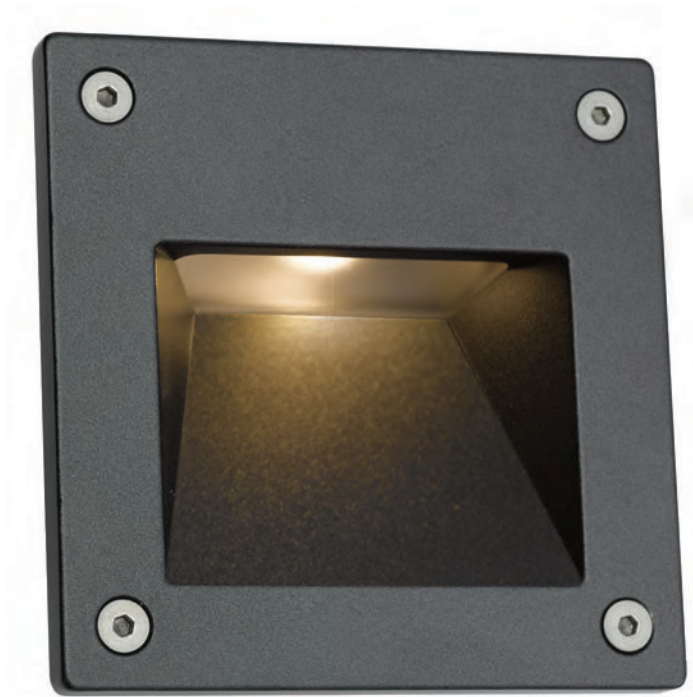

- Compact low level square LED pathway light with downward light spill suitable for residential and hospitality applications
- Die-cast aluminium construction with graphite paint finish
- Supplied c/w plastic installation box and pre-wired with 1 metre of rubber insulated cable for ease of installation
- Non-dimmable

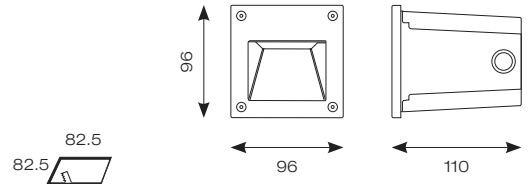

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-20°C to 25°C	L70 50,000	Ra 80	5	70°	1	IP65	IK02

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ACSQLEDWL	Cool White	3W	4000k	79lm	22lm	£111.00