


BRICK midi

581633.0031 | Wall luminaires



Wall luminaires  
4051859113782  
L 200, B 200, H 24

Wall (surface)  
anthracite metallic (DB703)

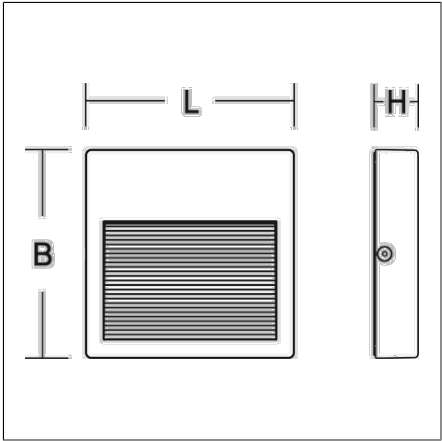

Flat surface-mounted LED fitting for illumination of wall related areas such as stairs, ramps or corridors. Housing made of corrosion-resistant die-cast aluminium, powder-coated. Stainless steel screws. Diffuser with clear toughened glass. Asymmetrical downward light distribution for wide dispersion and uniform illumination. With compensation for drill hole deviations. Driver integrated. With connecting terminal up to 1 x 3 x 1.5 mm², for max. 13 mm diameter mains cable.

Product specifications

Length L	200 mm
Width B	200 mm
Height H	24 mm
Weight	710 g
Light source	LED
Colour temperature	3000 K
Rated luminous flux	190 lm
System power	10 W
System efficiency	19 lm/W
Glare evaluation UGR (4H 8H)	30,9
Beam angle	47°/90°/0°/90°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	100 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	16
Luminaires on B16A fuse	27
Inrush current / Inrush current duration	27 A / 250 µs
CIE Flux Code / CEN Flux Code	51 81 95 96 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK09
Ambient temperature	-20 °C ... + 40 °C
Conformity mark	CE, EAC