




Surface mounted projectors
4051859762652
D 120, H 150

Track on ceiling
traffic white, matt (RAL 9016)

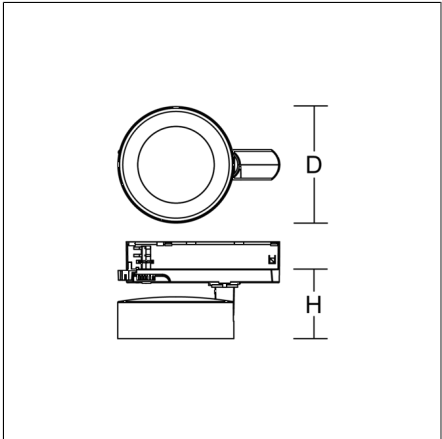

Surface mounted spotlight in modern, flat design. Housing: die-cast aluminium, powder-coated. Track-in driver integrated into the adapter. Rotation range: 356°. Swivel range: 90°. Plastic decorative ring, can be changed without tools. Lens optic: plastic (PMMA), exchangeable. Lens technology for the best homogeneity of the light cone. Wide beam light distribution. With multi adaptor for 3-circuit tracks 230 V. Accessories: exchangeable lens optic, decorative rings.

Product specifications

Diameter D	120 mm
Height H	150 mm
Weight	615 g
Light source	LED
Colour temperature	4000 K
Rated luminous flux	2100 lm 2550 lm
System power	20 W 25 W
System efficiency	102 lm/W 105 lm/W
Glare evaluation UGR (4H 8H)	20,4 21
Beam angle	36°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	90
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	33
Luminaires on B16A fuse	53
Luminaires on C10A fuse	53
Luminaires on C16A fuse	84
Inrush current / Inrush current duration	9.5 A / 16 µs
CIE Flux Code / CEN Flux Code	92 97 99 100 100
Type of protection	IP 20
Protection class	II
Filament test	650 °C
Impact resistance	IK06
Ambient temperature	-20 °C ... + 35 °C
Conformity mark	CE, EAC

Accessories



982843.000
Exchangeable lens optics, spot



982843.010
Exchangeable lens optics, medium

ARLINE

742189.002.1 | Surface mounted projector




982843.020
Exchangeable lens optics, flood



982843.030
Exchangeable lens optics, wide flood



982844.002
Decorative ring, white



982844.003
Decorative ring, black



982844.004
Decorative ring, silver



982844.005
Decorative ring, golden