


Recessed ceiling and wall luminaires  
4051859287230  
L 1141, B 71, H 2

Recessed ceiling mounting, wall (recessed)  
traffic white, matt (RAL 9016)

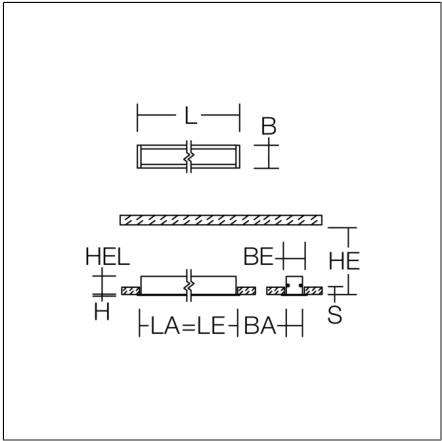

Linear recessed ceiling and wall luminaire for aesthetically sophisticated lighting. Housing: extruded aluminium profile, powder-coated. End cap aluminium powder-coated. Alea optical system: Reflector structure (ABS, Aluminium-coated, highly polished) with integrated diffuser made of non-yellowing plastic (PMMA) opal for glare-free light at the workstation (screen-compliant according to EN 12464-1). Ceiling installation with pre-assembled SBS mounting system. Suitable for Recessed ceiling mounting, wall (recessed). LED unit with integrated converter interchangeable and removable. With sensors or as a safety luminaire on request.

Product specifications

Length L	1141 mm
Width B	71 mm
Height H	2 mm
Cut-out length LA	1128 mm
Cut-out width BA	60 mm
Luminaire: recess height HEL	75 mm
Ceiling thickness S	10-30 mm
Installation space length LE	1128 mm
Installation space width BE	100 mm
Installation space height HE	100 mm
Weight	2.81 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	3550 lm
System power	28 W
System efficiency	127 lm/W
Glare evaluation UGR (4H 8H)	14,9
Beam angle	53°/50°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	21
Luminaires on B16A fuse	34
Luminaires on C10A fuse	35
Luminaires on C16A fuse	57
Inrush current / Inrush current duration	16 A / 100 µs
CIE Flux Code / CEN Flux Code	95 100 100 100 100
Type of protection	IP 20
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature	-20 °C ... + 30 °C
Conformity mark	CE, EAC