



TrueForce Core LED Industrial and Retail (Highbay – HPI/SON/HPL)

TFCore Core HB MV ND 35W E27 830 G3

Philips TrueForce Core LED I&R lamps offer an easy and short payback LED solution to replace High Intensity Discharge (HID) lamps. The products bring the energy efficiency and long lifetime benefits of LED to HID replacement and provide instant saving and low initial investment. With the right lamp size and light distribution, you can easily retrofit TrueForce Core LED I&R lamps and bypass the existing ballast while enhancing the lighting quality.

Product data

General Information		Operating and Electrical	
Cap-Base	E27	Luminous Efficacy (rated) (Nom)	137.00 lm/W
Nominal lifetime	15,000 hour(s)	Color Consistency	<6
Switching Cycle	50,000	Color rendering index (CRI)	80
Lighting Technology	LED	LLMF At End Of Nominal Lifetime (Nom)	70 %
Flux measurement reference	Sphere	Line Frequency	50 to 60 Hz
Light Technical		Input Frequency	50 to 60 Hz
Color Code	830 [CCT of 3000K]	Power Consumption	35 W
Beam Angle (Nom)	180 degree(s)	Lamp Current (Nom)	178 mA
Luminous Flux	4,800 lm	Starting Time (Nom)	0.5 s
Color Designation	White (WH)	Warm-up time to 60% light	0.5 s
Correlated Color Temperature (Nom)	3000 K	Power Factor (Fraction)	0.9

TrueForce Core LED Industrial and Retail (Highbay – HPI/SON/HPL)

Voltage (Nom)	220-240 V
Ballast Compatibility	Mains
Inrush current at mains	20.5
Max. lamp no. on MCB B type 10A – Mains	7
Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A – Mains	11
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	-

Temperature

T-Case Maximum (Nom)	76 °C
----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
Bulb Shape	T-shape
Net Weight (Piece)	0.164 kg


Approval and Application

Energy Efficiency Class	D
Energy Consumption kWh/1000 h	35 kWh
EPREL Registration Number	1745000
CE mark	Yes
EU RoHS compliant	Yes
Ambient temperature range	-20 °C to 45 °C

Product Data

Order product name	TForce Core HB MV ND 35W E27 830 G3
Full product name	TForce Core HB MV ND 35W E27 830 G3
Full product code	871869978105700
Order code	929002406602
Material Nr. (12NC)	929002406602
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718699781057
Numerator - Packs per outer box	6
EAN/UPC - Case	8718699781064


Dimensional drawing




Product	D	C
TForce Core HB MV ND 35W E27 830 G3	118 mm	193 mm

TrueForce Core LED Industrial and Retail (Highbay – HPI/SON/HPL)


Photometric data



Light Distribution Diagram - TForce Core HB MV ND 35W E27 830 G3

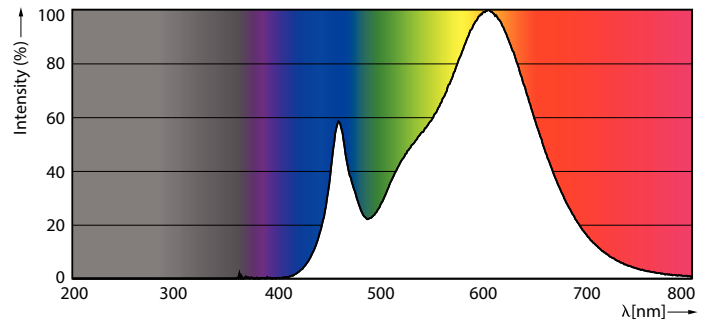


Spectral Power Distribution Colour - TForce Core HB MV ND 35W E27 830 G3




Technical Parameters (1) High Lighting (3) Page 11

General uniform lighting - TForce Core HB MV ND 35W E27 830 G3

Lifetime

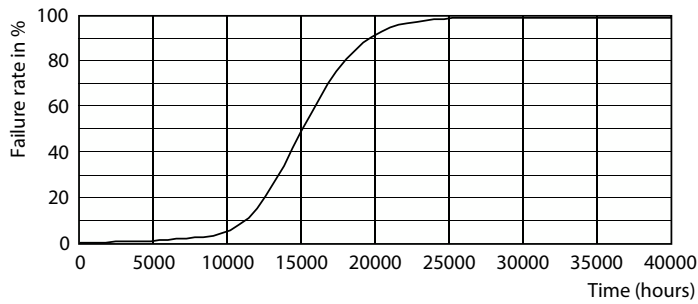

Life Expectancy Diagram

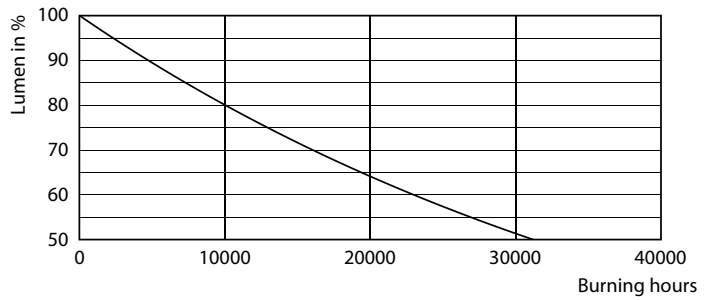

Lumen Maintenance Diagram - TForce Core HB MV ND 35W E27 830 G3

TrueForce Core LED Industrial and Retail (Highbay – HPI/SON/HPL)

