

Cesar Stride

THORN

96700570 CESAR STRIDE M SE 28L 930 HF ANT

LED 10W CESA_STRIDE_930	IP65	IK08	⊕	CE	
-------------------------	------	------	---	----	--


Cesar Stride

Cesar Stride a wall mounted, architectural LED luminaire for decorative facade lighting, asymmetrical distribution. Fixed output LED driver. Class I electrical, IP65, Impact strength: IK08. Housing: die-cast aluminium, powder coated anthracite. Working ambient temperature: -20°C to +40°C. Complete with 3000K LED.


Dimensions: Ø220 x 30 mm
 Luminaire input power: 10.1 W
 Luminaire luminous flux: 374 lm
 Luminaire efficacy: 37 lm/W
 Weight: 1.25 kg



TLG_CESA_F_STRIDE_M_SE_ANT.jpg

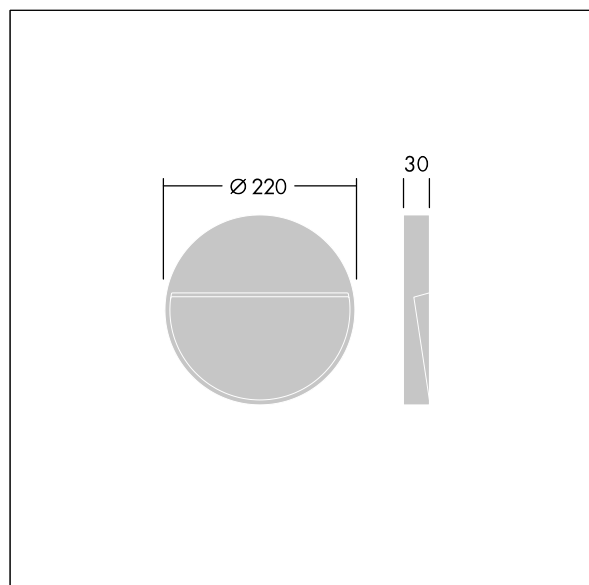

TLG_CESA_M_STRIDE_M.wmf

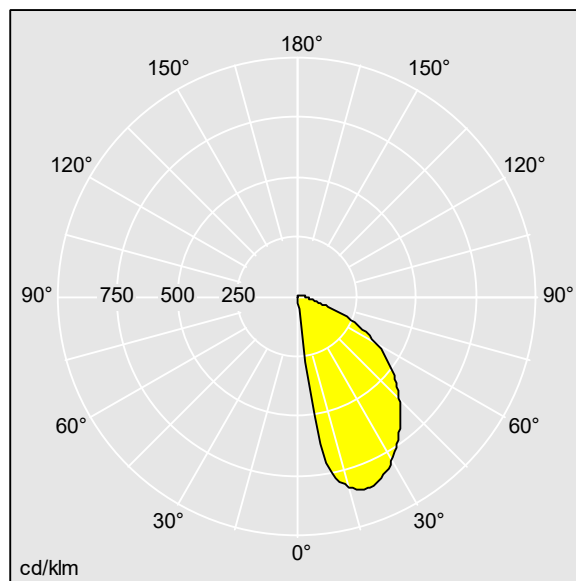

96700570.ltd

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 374 lm
 Luminaire efficacy*: 37 lm/W
 Colour Rendering Index min.: 90
 Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
 Rated useful life (B10)*:
 L80 70000 h at 25 °C
 Ballast: 1x LED_DRV
 Luminaire input power*: 10.1 W
 Dimming: FIX
 LOR: 1,00 ULOR: 0,04 DLOR: 0,96

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting