


PARLEDO

312575.002.76 | Recessed/Lay-in luminaires



Lay-in luminaires
4051859681007
L 622, B 622

Lay-in luminaires
white

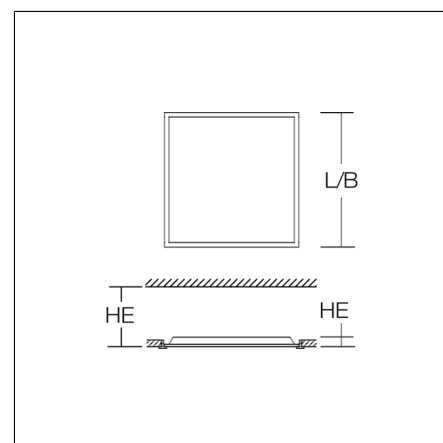

Highly efficient LED lay-in ceiling luminaire for high hygienic requirements. Particularly suitable for use in healthcare and industry. Housing: sheet steel, powder-coated. Frameless appearance in the modular ceiling thanks to the extra slim frame. Luminaire frame: aluminium, powder-coated. Diffuser with smooth surface on the room side for low sensitivity to dirt and easy cleaning. Diffuser made of resistant polycarbonate (PC), opal. LED backlight technology for homogeneous illumination of the entire light-emitting surface. External driver. Easy to install thanks to extended connection cable (2 m). IoT-ready. Suitable for through wiring as standard. Protection type IP 65 for luminaire and control gear on room and ceiling side. Qualified for use in the food and drink industry.

Product specifications

Length L	622 mm
Width B	622 mm
Cut-out length LA	600 mm
Cut-out width BA	600 mm
Luminaire: recess height HEL	41 mm
Installation space length LE	625 mm
Installation space width BE	625 mm
Installation space height HE	160 mm
Weight	4.46 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	5550 lm
System power	40 W
System efficiency	139 lm/W
Glare evaluation UGR (4H 8H)	22
Beam angle	114°
Rated life	60000 h (L80/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	12
Luminaires on B16A fuse	20
Luminaires on C10A fuse	21
Luminaires on C16A fuse	34
Inrush current / Inrush current duration	21 A / 230 µs
CIE Flux Code / CEN Flux Code	47 79 96 100 100
Type of protection	IP 65
Protection class	I
Filament test	650 °C
Impact resistance	IK06
Ambient temperature	-20 °C ... + 40 °C
Safety marks	Do not cover the recessed luminaire!
Conformity mark	CE, EAC

PARLEDO

312575.002.76 | Recessed/Lay-in luminaires



Accessories



981942.002

Mounting frame for installation in suspended ceilings.