



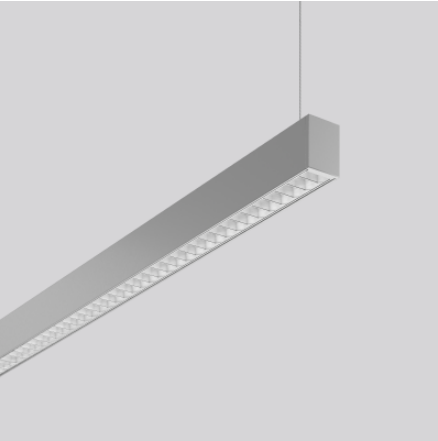

Pendant luminaires
4068754020978
L 1512, B 28, H 38

pendant
silver, matt (approx. RAL 9006)

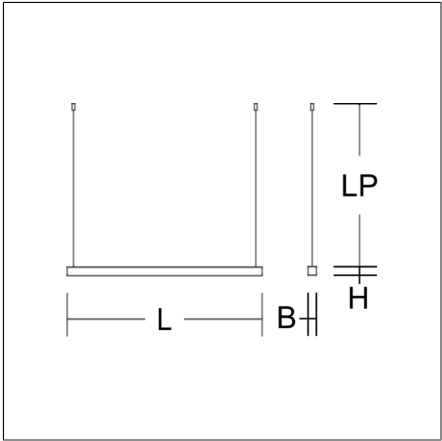

Pendant luminaire with slim design. Housing: extruded aluminium profile, powder-coated. End cap aluminium powder-coated. High polish aluminium micro grid. Perfect for office areas ($UGR \leq 19$) and environments with computer screens in accordance with EN 12464-1. Direct 60%, indirect 40% light emission. Suitable for pendant. 2-point steel cable suspension, steplessly adjustable. Special lengths available on request. External driver with connecting cable.

Product specifications

Length L	1512 mm
Width B	28 mm
Height H	38 mm
Suspension length LP	100-1500 mm
Weight	1.73 kg
Light source	LED
Colour temperature	#3000 K #3000 K
Rated luminous flux	3700 lm
System power	39 W
System efficiency	95 lm/W
Glare evaluation UGR (4H 8H)	15,1
Beam angle	down 67°/45° up 77°/101°
Rated life	60000 h (L80/B10)
Colour rendering index (CRI)	82
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	13
Luminaires on B16A fuse	21
Luminaires on C10A fuse	22
Luminaires on C16A fuse	36
Inrush current / Inrush current duration	41 A / 150 µs
CIE Flux Code / CEN Flux Code	90 99 100 64 100
Type of protection	IP 20
Protection class	II
Filament test	650 °C
Impact resistance	IK00
Ambient temperature	-25 °C ... + 25 °C
Safety marks	Do not cover the recessed luminaire!
Conformity mark	CE, EAC